



**Hitachi Freedom Storage™
Lightning 9900™ V Series
FlashAccess™ User's Guide**

© 2003 Hitachi Data Systems Corporation, ALL RIGHTS RESERVED

Notice: No part of this publication may be reproduced or transmitted in any form or by any means, electronic or mechanical, including photocopying and recording, or stored in a database or retrieval system for any purpose without the express written permission of Hitachi Data Systems Corporation.

Hitachi Data Systems reserves the right to make changes to this document at any time without notice and assumes no responsibility for its use. Hitachi Data Systems products and services can only be ordered under the terms and conditions of Hitachi Data Systems' applicable agreements. All of the features described in this document may not be currently available. Refer to the most recent product announcement or contact your local Hitachi Data Systems sales office for information on feature and product availability.

This document contains the most current information available at the time of publication. When new and/or revised information becomes available, this entire document will be updated and distributed to all registered users.

Trademarks

Hitachi Data Systems is a registered trademark and service mark of Hitachi, Ltd. The Hitachi Data Systems design mark is a trademark and service mark of Hitachi, Ltd.

Hitachi Freedom Storage, FlashAccess, ShadowImage, CruiseControl, Just In Time Storage, and Lightning 9900 are trademarks of Hitachi Data Systems Corporation.

S/390 is a registered trademark of International Business Machines Corporation.

Internet Explorer, Windows, and Windows NT are trademarks or registered trademarks of Microsoft Corporation.

Linux is a registered trademark of Linus Torvalds.

Mozilla is a trademark of the Mozilla Organization.

Netscape is a registered trademark of Netscape Communications Corporation.

Red Hat is a registered trademark of Red Hat, Inc.

Solaris and Java are trademarks or registered trademarks of Sun Microsystems, Inc.

All other brand or product names are or may be trademarks or service marks of and are used to identify products or services of their respective owners.

Notice of Export Controls

Export of technical data contained in this document may require an export license from the United States government and/or the government of Japan. Contact the Hitachi Data Systems Legal Department for any export compliance questions.

Document Revision Level

Revision	Date	Description
MK-92RD102-P	May 2002	Preliminary Release
MK-92RD102-0	July 2002	Initial Release
MK-92RD102-1	October 2002	Revision 1, supersedes and replaces MK-92RD102-0
MK-92RD102-2	January 2003	Revision 2, supersedes and replaces MK-92RD102-1
MK-92RD102-3	April 2003	Revision 3, supersedes and replaces MK-92RD102-2
MK-92RD102-4	October 2003	Revision 4, supersedes and replaces MK-92RD102-3

Source Documents for this Revision

- Fls45d3 (Hitachi RSD source document)
- Fls45d3a (Hitachi RSD source document)

Changes in This Revision

- Added note that Hi-Copy volumes cannot be used for FlashAccess operations (section 1.4)
- Replaced screen shot of Storage Navigator Main panel (Figure 2.1)

Referenced Documents

- *Hitachi Freedom Storage™ Lightning 9900™ V Series User and Reference Guide* (MK-92RD100)
- *Hitachi Freedom Storage™ Lightning 9900™ V Series Remote Console - Storage Navigator User's Guide* (MK-92RD101)
- *Hitachi Freedom Storage™ Lightning 9900™ V Series LUN Expansion (LUSE)/Virtual LVI/LUN (VLL) User's Guide* (MK-92RD104)
- *Hitachi Freedom Storage™ Lightning 9900™ V Series ShadowImage User's Guide* (MK-92RD110)
- *Hitachi Freedom Storage™ Lightning 9900™ V Series ShadowImage - S/390® User's Guide* (MK-92RD109)

Preface

This document describes and provides instructions for performing FlashAccess operations on the Lightning 9900™ V Series (9900V) subsystem using the 9900V Storage Navigator Java™ applet program.

This document assumes that:

- The user has a background in data processing and understands direct-access storage device (DASD) subsystems and their basic functions,
- The user is familiar with the Hitachi Lightning 9900™ V Series disk array subsystem,
- The user has read and understands the *Hitachi Lightning 9900™ V Series Hitachi Remote Console - Storage Navigator User's Guide* (MK-92RD101), and
- The user is familiar with the operating system (e.g., Windows®, Solaris™ or Red Hat® Linux®) and web browser software (e.g., Internet Explorer®, Netscape® Navigator® or Mozilla™) on the system hosting the 9900V Storage Navigator and FlashAccess remote console software.

Note: The term “9900V” refers to the entire Lightning 9900™ V Series subsystem family, unless otherwise noted. For further information on the Lightning 9900™ V Series subsystem, please contact your Hitachi Data Systems account team, or visit Hitachi Data Systems online at <http://www.hds.com>.

Note: The use of the FlashAccess software and all other Hitachi Data Systems products is governed by the terms of your license agreement(s) with Hitachi Data Systems.

Note: The FlashAccess screens shown in this document were captured on a Windows® system with the Internet Explorer web browser. The FlashAccess screens may display differently on other operating systems and browsers. Please refer to the *Hitachi Lightning 9900™ V Series Remote Console - Storage Navigator User's Guide* for further information on UNIX™ operating systems and browsers.

Microcode Level

This document revision applies to 9900V microcode versions 21-07-0x.

COMMENTS

Please send us your comments on this document: doc.comments@hds.com.

Make sure to include the document title, number, and revision.
Please refer to specific page(s) and paragraph(s) whenever possible.
(All comments become the property of Hitachi Data Systems Corporation.)

Thank you!

Contents

Chapter 1	Overview of FlashAccess Operations.....	1
1.1	Overview of FlashAccess	1
1.2	FlashAccess Modes.....	2
1.2.1	Priority Mode.....	2
1.2.2	Bind Mode.....	3
1.3	FlashAccess Cache Extents.....	5
1.4	FlashAccess Restrictions.....	6
Chapter 2	Preparing for FlashAccess Operations	9
2.1	System Requirements	9
2.2	Enabling the FlashAccess Option.....	10
2.3	Launching FlashAccess.....	11
2.4	Changing to Modify Mode.....	12
Chapter 3	FlashAccess Panels	15
3.1	FlashAccess Tab.....	15
3.1.1	FlashAccess Outline	17
3.1.2	LDEV Information Table	18
3.1.3	FlashAccess Tab, Cache Information Area.....	19
3.1.4	FlashAccess Tab, Operations Box	21
3.2	Multi Set Panel.....	23
3.3	Multi Release Panel	25
Chapter 4	Performing FlashAccess Operations.....	27
4.1	Placing Specific Data from one or more LDEVs into FlashAccess Cache	27
4.2	Placing All Data on one or more LDEVs into FlashAccess Cache	32
4.3	Releasing Specific Data From FlashAccess Cache	36
4.4	Releasing LDEV(s) from FlashAccess Cache.....	39
Chapter 5	Troubleshooting	43
5.1	Troubleshooting.....	43
5.2	Calling the Hitachi Data Systems Support Center	43
Acronyms and Abbreviations.....		45
Index.....		47

List of Figures

Figure 1.1	FlashAccess Cache Area (Cache Extent).....	1
Figure 3.1	FlashAccess Main Panel for Open Systems, FlashAccess Tab.....	15
Figure 3.2	FlashAccess Main Panel Showing Mainframe Volumes.....	16
Figure 3.3	Outline View on the FlashAccess Main Panel	17
Figure 3.4	LDEV Information Table Showing an Open-Systems LDEV	18
Figure 3.5	LDEV Information Table Showing a Mainframe LDEV	18
Figure 3.6	Cache Information Area on the FlashAccess Main Panel	19
Figure 3.7	Prestaging Operation In Progress.....	20
Figure 3.8	FlashAccess Operation in Progress	20
Figure 3.9	Operations Box Showing an Open Systems LDEV	21
Figure 3.10	Operations Box Showing a Mainframe LDEV	21
Figure 3.11	Multi Set Panel	23
Figure 3.12	Multi Release Panel.....	25
Figure 4.1	Selecting the LDEV and Specifying the Data Area and FlashAccess Options	29
Figure 4.2	Confirmation Message for Placing Data into Cache.....	29
Figure 4.3	Specifying the Same Data Area and Options for Multiple LDEVs.....	30
Figure 4.4	Selecting Additional LDEVs on the Multi Set Panel (Specific Data Range)	30
Figure 4.5	Verifying the Add Data Area Operation	31
Figure 4.6	Selecting an LDEV and Specifying the Options	33
Figure 4.7	Selecting LDEV(s) to Place in FlashAccess Cache	34
Figure 4.8	Selecting Additional LDEVs on the Multi Set Panel (All Data).....	34
Figure 4.9	Verifying the Add LDEV Operation(s)	35
Figure 4.10	Selecting a Data Area for Release.....	37
Figure 4.11	Confirmation Message for Deleting Data	37
Figure 4.12	Verifying the Release Data Operation(s)	38
Figure 4.13	Selecting LDEV(s) to Release from FlashAccess Cache.....	40
Figure 4.14	Selecting Multiple LDEVs on the Multi Release Panel	40
Figure 4.15	Verifying the Release LDEV Operation(s)	41

List of Tables

Table 1.1	FlashAccess Specifications.....	5
Table 1.2	Logical Block Addresses for Open Systems (Other Than OPEN-V)	7

Chapter 1 Overview of FlashAccess Operations

1.1 Overview of FlashAccess

The FlashAccess feature of the 9900V subsystem allows you to store specific data in cache memory. FlashAccess increases the data access speed for the cache-resident data by enabling read and write I/Os to be performed at host data transfer speeds (see Figure 1.1).

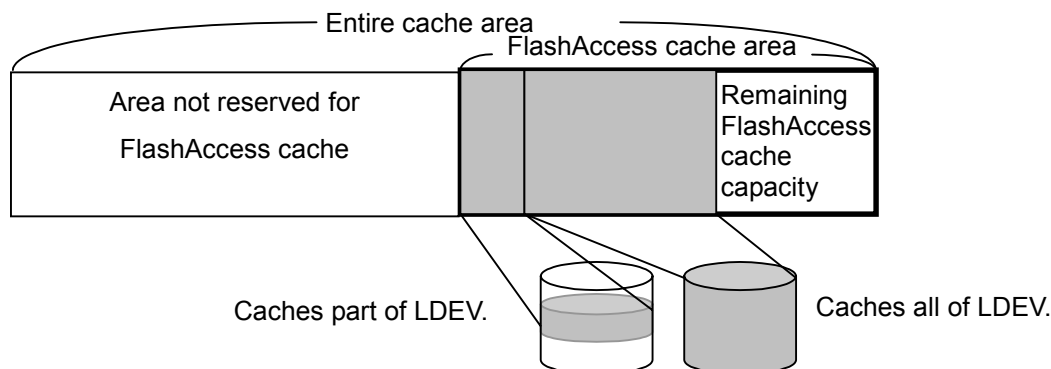


Figure 1.1 FlashAccess Cache Area (Cache Extent)

This document describes and provides instructions for FlashAccess operations using the licensed 9900V Hitachi Remote Console - Storage Navigator software. The Storage Navigator software communicates directly with the 9900V subsystems via a local-area network (LAN). The Storage Navigator software displays detailed FlashAccess information and allows you to configure and perform FlashAccess operations for the data stored on the 9900V subsystem.

FlashAccess operations support both open-system volumes (e.g., OPEN-3, OPEN-9, etc.) and S/390[®] mainframe volumes (e.g., 3390-3, 3390-9, etc.).

FlashAccess can be used in conjunction with Virtual LVI/LUN to achieve better performance improvements than when either of these options is used individually. If you need to store an entire mainframe or open-system volume in FlashAccess cache, you can use a small Virtual LVI/LUN volume to decrease the amount of cache required for the volume. For further information on Virtual LVI/LUN, please see *Hitachi Lightning 9900™ V Series LUN Expansion (LUSE)/Virtual LVI/LUN (VLL) User's Guide (MK-92RD104)*.

Caution: The user may want to increase total subsystem cache capacity when using FlashAccess to avoid data access performance degradation for non-FlashAccess data. FlashAccess is only available on 9900V subsystems configured with at least 512 MB of cache. The Hitachi Data Systems representative configures the maximum allowable FlashAccess area when the cache is installed.

1.2 FlashAccess Modes

FlashAccess provides the following two operational modes for storing user data in cache memory:

- Priority mode (see section 1.2.1), and
- Bind mode (see section 1.2.2).

1.2.1 Priority Mode

In **Priority Mode** (normal mode), the total capacity of cache required is:

Standard cache + FlashAccess cache + Additional cache

The main advantage of FlashAccess priority mode is that read data is transferred at host data transfer speed. In priority mode the FlashAccess extents are used to hold read data for specific extents on volumes. Write data is write duplexed in normal cache and de-staged to disk using standard algorithms. Because there is no duplexed write data in the cache reserved for FlashAccess, all priority mode FlashAccess extents are 100% utilized by user read-type data.

- For OPEN-V, one slot is 66 kB, which requires 4 cache segments (16.5 kB/segment). For example, 16 slots require 1,056 kB of reserved cache. For other than OPEN-V, one slot is 49.5 kB, which requires 3 cache segments. For example, 16 slots require 792 kB of reserved cache.
- For S/390® (3390) volumes, one slot is 66 kB. This requires 4 cache segments (16.5 kB/segment). Sixteen (16) slot images for S/390® requires 1,056 kB of reserved cache.

Note: Even though a track for 3390 volumes is 56 kB, because cache is divided into 16.5 kB segments, it will require 4 segments.

When you install the FlashAccess feature using priority mode, the amount of additional cache required depends on the number of cache extents. If you are installing 512 or fewer cache extents, you must install 512 MB × 2 of additional cache. If you are installing between 513 and 1024 cache extents, you must install 1024 MB × 2 of additional cache.

1.2.2 Bind Mode

In **Bind Mode**, the total capacity of cache required is:

Standard cache + FlashAccess cache

In bind mode the FlashAccess extents are used to hold read and write data for specific extent(s) on volume(s). Any data written to the FlashAccess bind area is not de-staged to the disk. To ensure data integrity, write data must be duplexed in the FlashAccess area, which consumes a significant amount of the FlashAccess cache.

The primary advantage of bind mode is that all targeted read and write data is transferred at host data transfer speed. In addition, the accessibility of read data is the same as FlashAccess priority mode; write operations do not have to wait for available cache segments; and there will be no backend contention caused by destaging data.

- **RAID-5.** For RAID-5 subsystems the amount of FlashAccess cache required is 3 times the space required for the user data.
 - For RAID-5 open-systems volumes, for OPEN-V, one slot is 66 kB, which requires 12 cache segments (16.5 kB/segment). For example, 16 slots require 3,168 kB of reserved cache. For other than OPEN-V, one slot is 49.5 kB, which requires 9 cache segments. For example, 16 slots require 2,376 kB of reserved cache.
 - For RAID-5 S/390® (3390) volumes, One slot is 66 kB, which requires 12 cache segments (16.5 kB/segment). For example, 16 slot images for S/390® require 3,168 kB of reserved cache.

Note: Even though a track for S/390® is 56 kB, because cache is divided into 16.5 kB segments, it will require 4 segments.

Note: If a RAID-5 volume area is changed from priority mode to bind mode and no cache is added, then only 33% of the user data will fit in the area previously assigned for priority mode.

- **RAID-1.** For RAID-1 subsystems the amount of FlashAccess cache required is 2 times the space required for user data.
 - For RAID-1 open-systems volumes, For OPEN-V, one slot is 66 kB, which requires 8 cache segments (16.5 kB/segment). For example, 16 slots require 2,112 kB of reserved cache. For other than OPEN-V, one slot is 49.5 kB, which requires 6 cache segments. For example, 16 slots require 1,584 kB of reserved cache.
 - For RAID-1 S/390® (3390) volumes, One slot is 66 kB, which requires 8 cache segments (16.5 kB/segment). For example, 16 slot images for S/390® requires 2,112 kB of reserved cache.
- If a RAID-5 volume area is changed from priority mode to bind mode and no cache is added, then only 33% of the user data will fit in the area previously assigned for priority mode, and the remaining 67 percent is used to save read/write data.

Note: Changing the mode without cache extension requires a FlashAccess reconfiguration.
- If a RAID-1 volume area is changed from priority mode to bind mode and no cache is added, then only 50% of the user data will fit in the area previously assigned for priority mode, and the remaining 50 percent is used to save read/write data.

Note: Changing the mode without cache extension requires a FlashAccess reconfiguration.

FlashAccess bind data that has write attributes is normally not destaged. However, this data will be destaged in the following cases:

- During certain types of maintenance operations (e.g. cache upgrades);
- If the subsystem is powered off;
- If the volume is deleted from FlashAccess bind mode;
- If a fixed or customized volume that is partly or wholly assigned to FlashAccess is converted into free space by the Virtual LVI/LUN Volume-to-Space function.
- If a VDEV containing volumes that are assigned to FlashAccess is initialized by the Virtual LVI/LUN Volume Initialization function.

For further information on Virtual LVI/LUN, please see the *Hitachi Lightning 9900™ V Series LUN Expansion (LUSE)/Virtual LVI/LUN (VLL) User's Guide* (MK-92RD104).

1.3 FlashAccess Cache Extents

The FlashAccess cache areas (called cache extents) have the following parameters:

- The cache extents are dynamic and can be added and deleted at any time.
- The 9900V supports a maximum of 1,024 addressable cache extents per LDEV and per subsystem.
- For mainframe volumes, each FlashAccess cache area must be defined on contiguous tracks, with a minimum size of one cache slot (or track) and a maximum size of one LVI. This is equivalent to 66kB.
- For open-systems volumes, FlashAccess cache extents must be defined in logical blocks using logical block addresses (LBAs), with a minimum size of 128 LBAs for OPEN-V (equivalent to 66kB) and 96 LBAs for other than OPEN-V. However, in most cases users will assign an entire open-system volume for FlashAccess. If the remaining cache memory is less than 256 MB, FlashAccess is not available.
- The user has the option of prestaging the data to the resident cache area. If prestaging is not used, the data will be loaded into the FlashAccess extents when the first 'miss' occurs. If prestaging is used, performance may be affected for a short time while the data is read into FlashAccess cache. **Note:** Prestaging of FlashAccess data should not be performed during peak activity.
- All write I/Os to FlashAccess data are duplex writes, guaranteeing full data integrity. The FlashAccess data remains fixed in cache until the user manually deletes it. Deletion of FlashAccess extents will destage any write data to the affected volume(s).
- It is possible to expand the amount of FlashAccess cache without canceling the existing FlashAccess settings. Please call the Hitachi Data Systems Support Center for assistance.

Table 1.1 FlashAccess Specifications

Item	Specifications	
	Open Systems	S/390®
Emulation Type	OPEN-3, 8, 9, E, L, V	3390-3, 3A, 3B, 3C, 3R, 9, L
Cache Area Allocation	For OPEN-V, at least 128 LBAs (Logical Block Address): Equivalent to 66 kB for other than OPEN-V, at least 96 LBAs (Logical Block Address): Equivalent to 49.5 kB	At least one cache slot (or track): Equivalent to 66 kB. Up to 1 LDEV
Supported Volumes	Normal volumes, LUN Expansion (LUSE) volumes and Virtual LVI/LUN (VLL) volumes	Normal volumes and Virtual LVI/LUN (VLL) volumes
Number of cache areas	1024 per LDEV and per subsystem	1024 per LDEV and per subsystem

1.4 FlashAccess Restrictions

The following are restrictions on the use of the FlashAccess function:

- **Warning:** Do not perform the ShadowImage quick restore operation or the CruiseControl migration operation on a FlashAccess volume. These operations swap the internal locations of the source and target volumes, which causes a loss of data integrity.

For further information, please refer to the *Hitachi Lightning 9900™ V Series ShadowImage User's Guide*, the *Hitachi Lightning 9900™ V Series ShadowImage - S/390® User's Guide*, and/or the *Hitachi Lightning 9900™ V Series CruiseControl User's Guide*.

- Do not attempt to allocate FlashAccess cache beyond the allocated capacity.
- You cannot allocate Just In Time (on-demand) volumes for FlashAccess.
- You cannot allocate Hi-Copy volumes for FlashAccess.

The following Virtual LVI/LUN (VLL) operations automatically reset FlashAccess cache:

- When a fixed or customized volume that is partly or wholly assigned to FlashAccess is converted into free space by the VLL Volume to Space function.
- When a VDEV containing volumes that are assigned to FlashAccess is initialized by the VLL Volume Initialization function.

For further information on Virtual LVI/LUN, please refer to the *Hitachi Lightning 9900™ V Series LUN Expansion (LUSE)/Virtual LVI/LUN (VLL) User's Guide* (MK-92RD104).

Caution: You may want to increase total subsystem cache capacity when using FlashAccess to avoid data access performance degradation for non-FlashAccess data. FlashAccess is only available on 9900V subsystems configured with at least 512 MB of cache. The Hitachi Data Systems representative configures the maximum allowable FlashAccess area when the cache is installed.

Note: The FlashAccess function recognizes open-system logical blocks in 96-block increments. For example, if you enter a starting LBA as 1 and an ending LBA as less than 96, FlashAccess automatically changes the beginning LBA to 00 and the ending LBA to 95. Table 1.2 shows the LBA blocks for open systems (other than OPEN-V). **Note:** OPEN-V logical blocks are in 128-byte increments.

Table 1.2 Logical Block Addresses for Open Systems (Other Than OPEN-V)

Starting LBA	Ending LBA	Starting LBA	Ending LBA	Notes
0	95	192000	192095	
96	191	288000	288095	
192	287	384000	384095	
288	383	480000	480095	
384	479	576000	576095	
480	575	672000	672095	
576	671	768000	768095	
672	767	864000	864095	
768	863	960000	960095	
864	959	1920000	1920095	
960	1055	2880000	2880095	
1920	2015	3661824	3661919	
2880	2975	3840000	3840095	
3840	3935	4800000	4800095	
4800	4895	4806624	4806719	OPEN-3 maximum LBA
5760	5855	4806720	4806815	
6720	6815	5760000	5760095	
7680	7775	6720000	6720095	
8640	8735	7680000	7680095	
9600	9695	8640000	8640095	
19200	19295	9600000	9600095	
29900	28895	10560000	10560095	
38400	38495	11520000	11520095	
48000	48095	12480000	12480095	
57600	57695	13440000	13440095	
67200	67295	14350944	14351039	OPEN-8 maximum LBA
71904	71999	14422944	14423039	OPEN-9 maximum LBA
72000	72095	28452864	28452959	OPEN-E maximum LBA
76800	76895	71192064	71192159	OPEN-L maximum LBA
86400	86495			
96000	96095			

Chapter 2 Preparing for FlashAccess Operations

2.1 System Requirements

FlashAccess operations involve the 9900V subsystem(s), the host server(s) which access the data stored in the 9900V subsystem, the fibre-channel connections between the 9900V and the host server(s), and the licensed FlashAccess software.

The FlashAccess system requirements are:

- **Hitachi Lightning 9900™ V Series subsystem.** FlashAccess supports all physical disk drive options and RAID-level configurations for the 9900V subsystem.
The 9900V currently provides the following logical unit (LU) types: OPEN-3, OPEN-8, OPEN-9, OPEN-E, OPEN-L, and OPEN-V. **Note:** Please contact your Hitachi Data Systems account team for the latest information on LU types.
- **Storage Navigator:** The Storage Navigator remote console software is required for 9900V FlashAccess operations. The FlashAccess remote console software is a component of the 9900V Hitachi Storage Navigator product. For instructions on installing the 9900V Storage Navigator computer(s) and software, please refer to the *Hitachi Lightning 9900™ V Series Hitachi Remote Console - Storage Navigator User's Guide* (MK-92RD101).
Note: Administrator or FlashAccess write access to the 9900V Storage Navigator software is required to perform FlashAccess operations. Users without Administrator or FlashAccess write access can only view FlashAccess information.
Note: You must operate the 9900V Storage Navigator software in modify mode to perform FlashAccess operations. Users in view mode can only view FlashAccess information.
- **FlashAccess license key code:** The **FlashAccess** license key code is required to enable the **FlashAccess** option on the 9900V subsystem (see section 2.2).

2.2 Enabling the FlashAccess Option

You must enable the FlashAccess option on the 9900V subsystem using the 9900V Storage Navigator remote console software. Each 9900V subsystem requires its own separate set of license key codes.

For instructions on using the 9900V Storage Navigator software and enabling the option, please refer to the *Hitachi Lightning 9900™ V Series Hitachi Remote Console - Storage Navigator User's Guide* (MK-92RD101).

Note: When you use Storage Navigator on UNIX® workstations or in other non-Windows® environments, certain additional operating conventions must be followed. For details, please refer to the *Hitachi Lightning 9900™ V Series Remote Console - Storage Navigator™ User's Guide* (MK-92RD101).

Disabling FlashAccess

For information on disabling the FlashAccess option, please refer to the *Hitachi Lightning 9900™ V Series Hitachi Remote Console - Storage Navigator User's Guide*.

2.3 Launching FlashAccess

To use FlashAccess, first log on to the primary SVP. For detailed instructions on the login process, see *Hitachi Freedom Storage™ Lightning 9900™ V Series Remote Console - Storage Navigator User's Guide* (MK-92RD101).

If you successfully log on to the primary SVP, the Storage Navigator main panel opens (see Figure 2.1). The option buttons are displayed on the left side of the panel. **FlashAccess** () opens the FlashAccess/PCR panel.

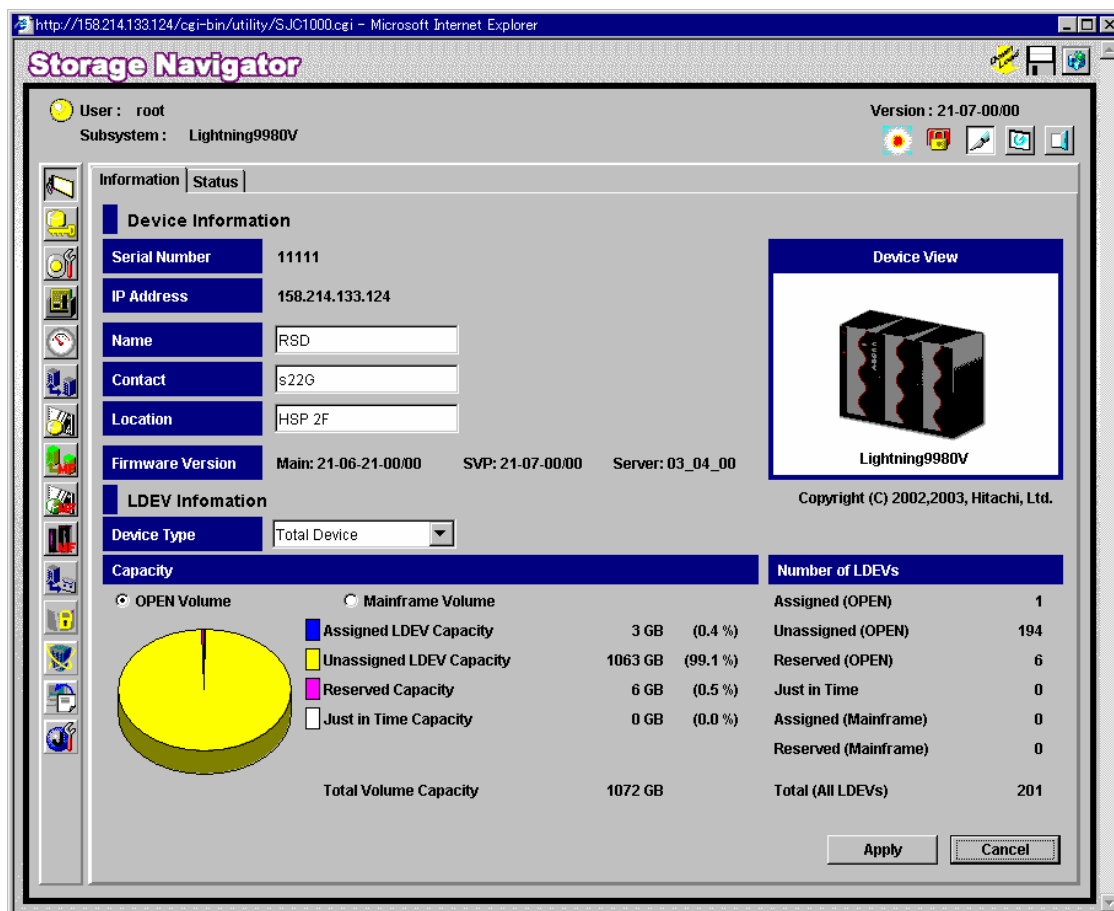


Figure 2.1 Storage Navigator Main Panel, Information Tab

2.4 Changing to Modify Mode

If you are going to implement any changes for FlashAccess, you must be in **Modify** mode. The subsystem information icons (see Figure 2.2) are on the upper right corner. These icons are described in detail in *Hitachi Freedom Storage™ Lightning 9900™ V Series Remote Console - Storage Navigator* (MK-92RD101). If you want to change from **View** mode to **Modify** mode and back, two of the icons are important:

- Exclusive lock icons indicate the operation mode of all currently logged-in users. If all users are operating in **View** mode, the **Unlocked** icon () is displayed. If a user is operating in **Modify** mode, or if subsystem maintenance or SNMP operations are being performed, the **Locked** icon () is displayed.
- **Mode-Changing** buttons allow users to change the operation mode between **View** mode () and **Modify** mode (). **Note:** Only one user at a time can be in **Modify** mode.

To change between View and Modify modes:

1. You must have administrator or write access for the option that you want to use. For details on assigning user access, see *Hitachi Freedom Storage™ Lightning 9900™ V Series Remote Console - Storage Navigator* (MK-92RD101).
2. Verify that the subsystem is unlocked. If all users are operating in **View** mode, the **Unlocked** icon () and the **View Mode** icon () are displayed (see Figure 2.2). If a user is operating in **Modify** mode, or if subsystem maintenance is being performed, the **Locked** icon () is displayed, and you cannot change to **Modify** mode.
3. Select the **Mode Changing** icon (), which should be in **View** mode. A confirmation message displays (see Figure 2.3). Select **OK**.
4. The **Mode Changing** icon changes from **View** mode to **Modify** mode (). The **Locked** icon () displays (see Figure 2.4).
5. Change back to **View** mode once you have applied the change. Select the **Mode Changing** icon (). The confirmation message displays (see Figure 2.3).
6. Select **OK**, and you are returned to **View** mode.



Figure 2.2 Icons Showing Unlocked Status and View Mode

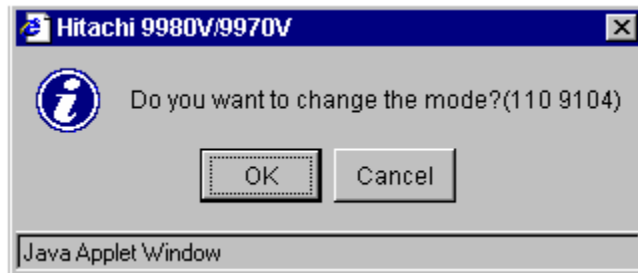


Figure 2.3 Mode Changing Confirmation Message




Figure 2.4 Icons Showing Locked Status and Modify Mode

Chapter 3 FlashAccess Panels

3.1 FlashAccess Tab

The **FlashAccess** button () on the Storage Navigator Main panel opens the FlashAccess/PCR Main panel (see Figure 3.1 and Figure 3.2), which displays the FlashAccess information for the connected 9900V subsystem and provides access to all FlashAccess operations. The **FlashAccess** tab is the default view.

Note: For information and instructions on using the 9900V Storage Navigator Java™ applet program, please refer to the *Hitachi Lightning 9900™ V Series Hitachi Remote Console - Storage Navigator User's Guide* (MK-92RD101).

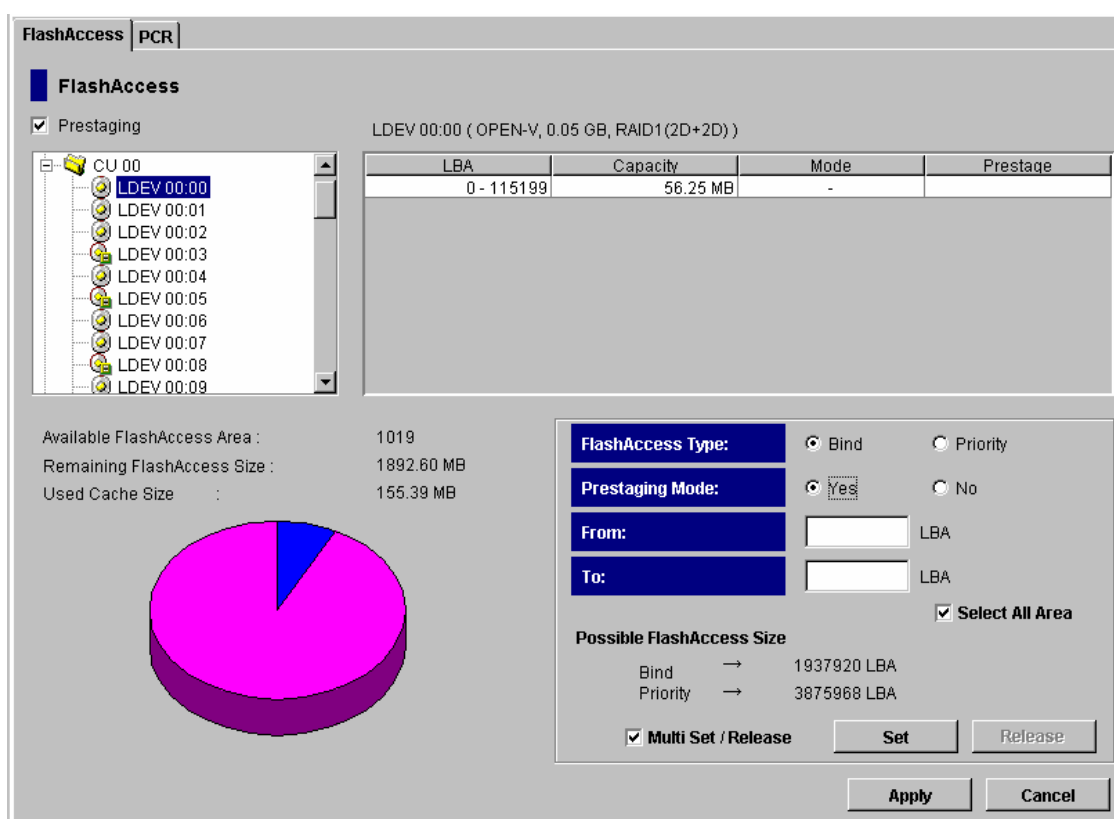


Figure 3.1 FlashAccess Main Panel for Open Systems, FlashAccess Tab

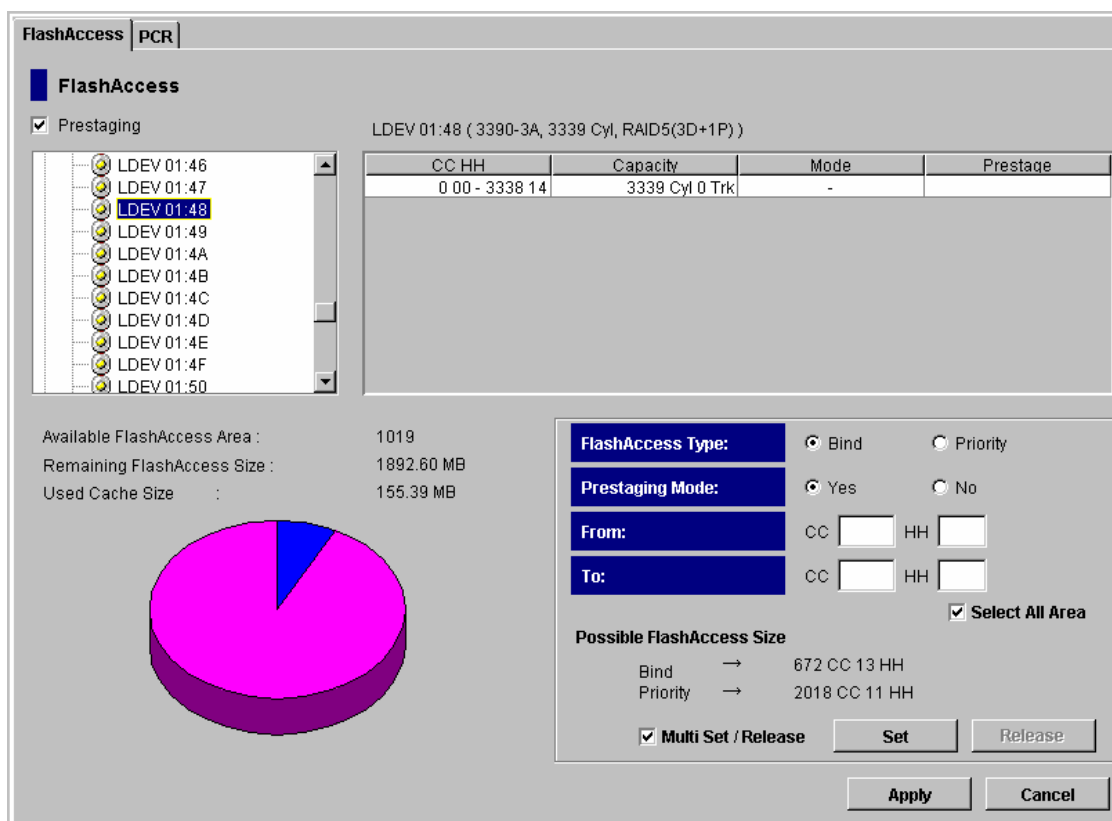


Figure 3.2 FlashAccess Main Panel For Mainframe Systems, FlashAccess Tab

3.1.1 FlashAccess Outline

The FlashAccess outline view (see Figure 3.3), located on the upper left corner of FlashAccess main panel, displays the 9900V LDEVs available for FlashAccess operations and allows you to enable and disable the prestaging function. The outline view does not display CruiseControl reserved volumes or HPAV alias volumes, because those volumes are not available for FlashAccess operations.

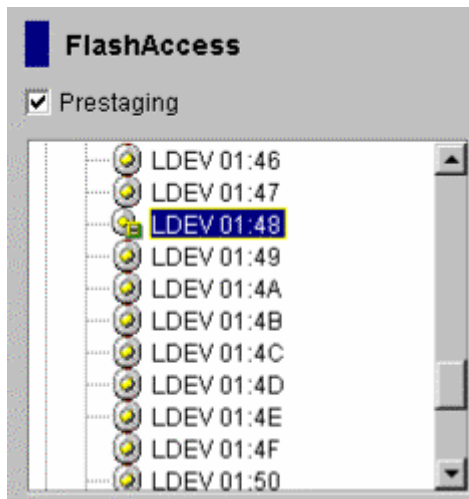


Figure 3.3 FlashAccess Tab, Outline View

The FlashAccess outline view has the following features:

- The **Prestaging** checkbox allows you to enable and disable the prestaging function.
 - If you select this checkbox and select the **Apply** button, a non-prestaging operation is performed, and then a prestaging operation is performed.
 - If you clear this checkbox and select the **Apply** button, a non-prestaging operation is performed. If you select this checkbox later and select the **Apply** button, only a prestaging operation is performed.

Note: The **Prestaging** checkbox is selected by default. The **Prestaging** checkbox is disabled (grayed out) when there is no cache, and when the **Prestaging Mode** is set to **No** for each cache extent.

- The outline view displays the 9900V volumes available for FlashAccess operations by control unit (CU) and LDEV number (e.g., LDEV 01:48 is LDEV 48 in CU 01). The icons in the outline view are:

-  Indicates an open folder.
-  Indicates an unopened folder.
-  Indicates an LDEV for which FlashAccess is not set.
-  Indicates an LDEV for which FlashAccess is set.

3.1.2 LDEV Information Table

The LDEV information table (see Figure 3.4 and Figure 3.5), located on the upper right corner of FlashAccess main panel, displays the capacity (in MB for LUs, in cylinders and tracks for LVIs) and FlashAccess settings for the LDEV selected in the outline view.

LDEV 00:00 (OPEN-3, 0.04 GB, RAID1(2D+2D))			
LBA	Capacity	Mode	Prestage
0 - 20063	9.75 MB	BIND	ON
20064 - 49919	14.57 MB	-	
49920 - 60095	4.92 MB	BIND	ON
60096 - 69983	4.82 MB	-	
69984 - 80063	4.87 MB	BIND	ON
80064 - 86399	3.09 MB	-	

Figure 3.4 FlashAccess Tab, LDEV Information (Open-Systems)

LDEV 01:48 (3390-3A, 3339 Cyl, RAID5(3D+1P))			
CC HH	Capacity	Mode	Prestage
0 00 - 19 14	20 Cyl 0 Trk	-	
20 00 - 25 14	6 Cyl 0 Trk	BIND	ON
26 00 - 3338 14	3313 Cyl 0 Trk	-	

Figure 3.5 FlashAccess Tab, LDEV Information (Mainframe Systems)

The LDEV information table has the following features:

- The first column, **LBA** or **CC HH**, displays the data location(s) on the LDEV by starting and ending addresses (LBAs for open-systems LDEVs, CC HH for mainframe LDEVs).
- The **Capacity** column displays the capacity of the data stored in FlashAccess cache (in MB for open-systems LDEVs, in cylinders and tracks for mainframe LDEVs).
- The **Mode** column displays the FlashAccess cache mode:
 - **PRIO** indicates priority mode.
 - **BIND** indicates bind mode.
 - A dash (-) indicates that the area is not allocated for FlashAccess cache.
- The **Prestage** column displays the setting for the prestaging function:
 - **Blank** indicates that the prestaging function is not set.
 - **ON** indicates that the prestaging function is set.

3.1.3 FlashAccess Tab, Cache Information Area

The cache information area (see Figure 3.6), located on the lower left corner of the FlashAccess main panel, displays information on the 9900V cache usage.

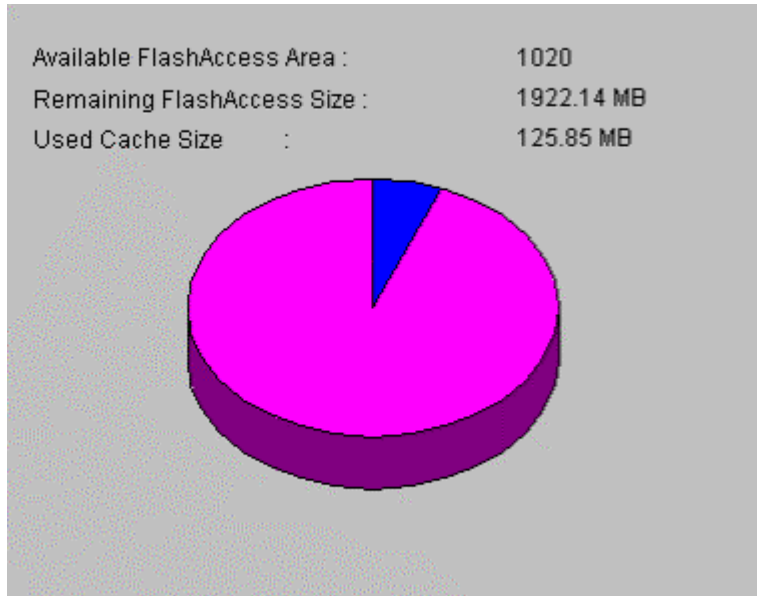


Figure 3.6 FlashAccess Tab, Cache Information Area

The cache information area has the following features:

- **Available FlashAccess Area** displays the unused cache area, calculated by subtracting the number of installed FlashAccess cache extents from the maximum number of FlashAccess cache extents (1,024).
- **Remaining FlashAccess Size** displays the amount of FlashAccess cache which is available for use (pink area on the pie chart).
- **Used Cache Size** displays the usage of FlashAccess cache.
- **Pie chart.** The colors in the pie chart are:
 - **Blue** indicates cache usage.
 - **Yellow** indicates the increase in the specified size of the cache.
 - **Pink** indicates the remaining amount of available cache.
- **Operation in progress.**
 - When a prestaging operation is in progress, the FlashAccess panel displays **Prestaging operation in progress** (see Figure 3.7).
 - When a FlashAccess operation is in progress, the FlashAccess panel displays **FlashAccess operation in progress** (see Figure 3.8).

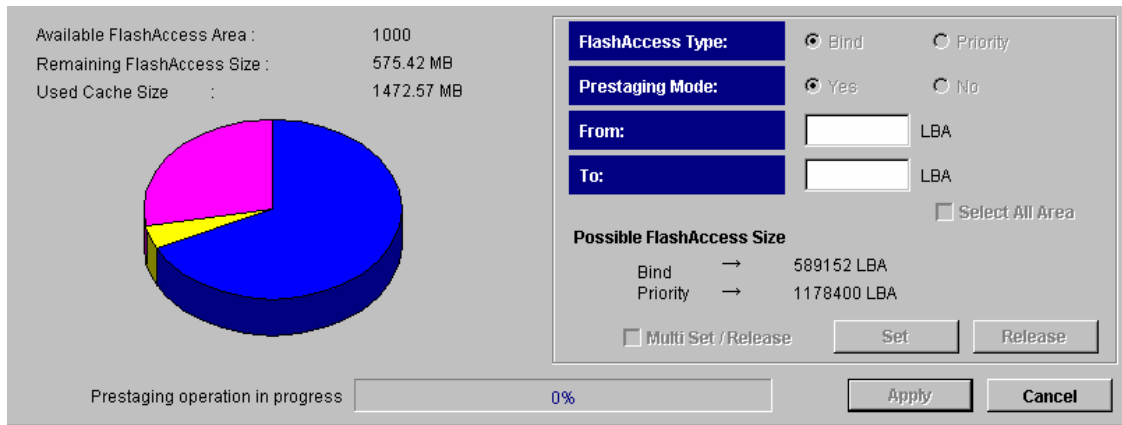


Figure 3.7 FlashAccess Tab, Prestaging Operation In Progress


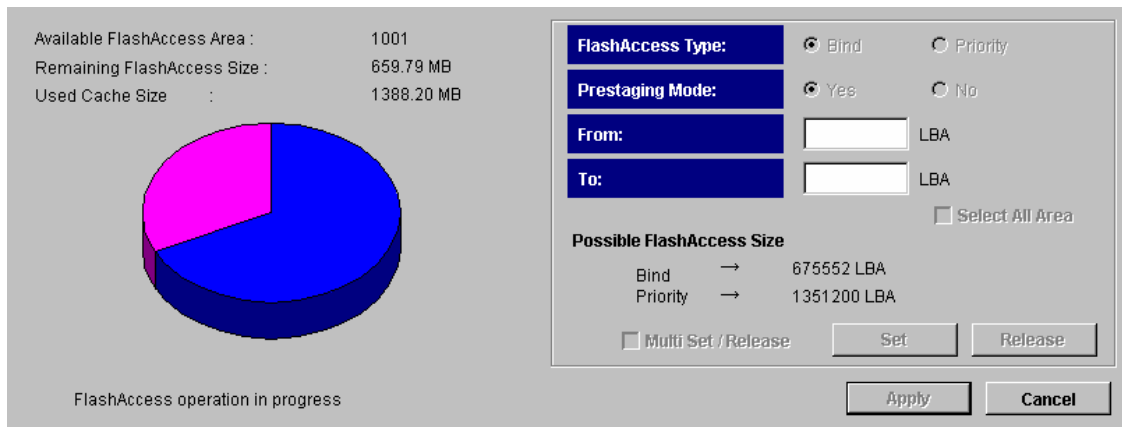


Figure 3.8 FlashAccess Tab, FlashAccess Operation in Progress

3.1.4 FlashAccess Tab, Operations Box


The operations box (see Figure 3.9 and Figure 3.10), located on the lower right corner of the FlashAccess main panel, allows you to add data to and release data from FlashAccess cache.

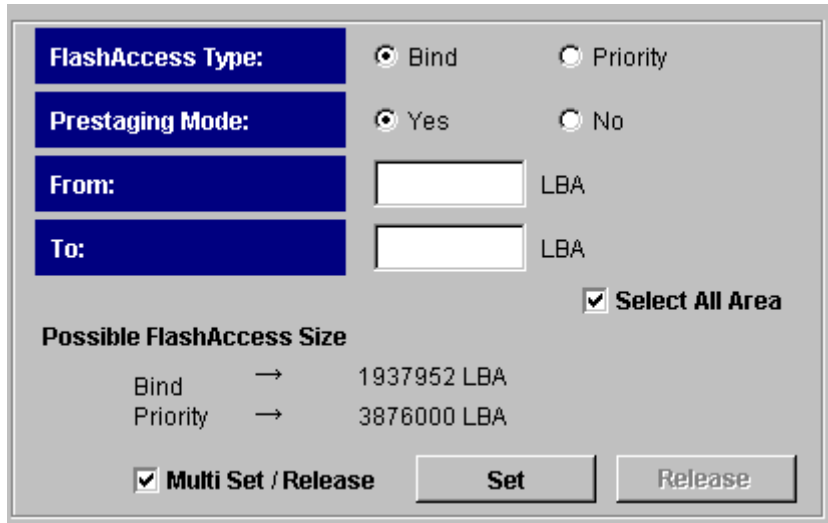

The dialog box for Open Systems has the following fields and controls:

- FlashAccess Type:** Radio buttons for **Bind** (selected) and **Priority**.
- Prestaging Mode:** Radio buttons for **Yes** (selected) and **No**.
- From:** A text input field followed by the label **LBA**.
- To:** A text input field followed by the label **LBA**.
- Select All Area:** A checked checkbox.
- Possible FlashAccess Size:**
 - Bind → 1937952 LBA
 - Priority → 3876000 LBA
- Multi Set / Release:** A checked checkbox.
- Buttons:** **Set** and **Release**.

Figure 3.9 FlashAccess Tab, Operations Box (Open Systems)

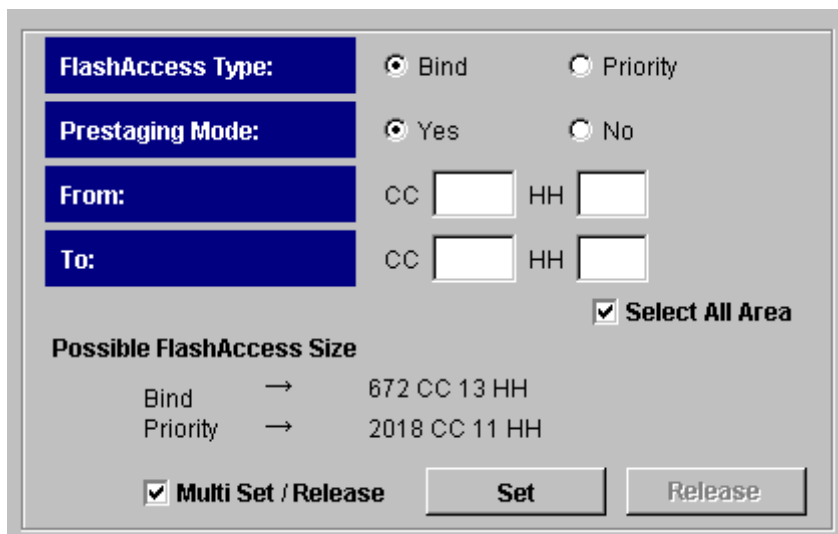

The dialog box for Mainframe Systems has the following fields and controls:

- FlashAccess Type:** Radio buttons for **Bind** (selected) and **Priority**.
- Prestaging Mode:** Radio buttons for **Yes** (selected) and **No**.
- From:** Two text input fields labeled **CC** and **HH**.
- To:** Two text input fields labeled **CC** and **HH**.
- Select All Area:** A checked checkbox.
- Possible FlashAccess Size:**
 - Bind → 672 CC 13 HH
 - Priority → 2018 CC 11 HH
- Multi Set / Release:** A checked checkbox.
- Buttons:** **Set** and **Release**.

Figure 3.10 FlashAccess Tab, Operations Box (Mainframe Systems)

The FlashAccess Operations box has the following features:

- The **FlashAccess Type** buttons allow you to select the mode (see section 1.2) for the data to be added to FlashAccess cache.
 - **Bind** sets bind mode.
 - **Priority** sets priority mode.

- The **Prestaging Mode** buttons allow you to enable or disable the prestaging mode.
 - **Yes** enables prestaging mode. The prestaging operation will be performed if you select the **Prestaging** checkbox and select the **Apply** button.
 - **No** disables prestaging mode.
- The **From** and **To** boxes allow you to enter the starting and ending addresses for the data to be placed in cache, specified in LBAs for open-systems LDEVs, and in CC HH numbers for mainframe LDEVs.
- The **Select All Area** checkbox allows you to select all data areas in the selected LDEV for FlashAccess cache. This checkbox can only be selected if no data areas in the selected LDEV are assigned to FlashAccess cache.

Note: If you check the **Select All Area** box, the starting address and ending address (**From** and **To**) fields are cleared.
- **Possible FlashAccess Size** displays the cache size available for FlashAccess data.
 - **Bind** displays the available size for bind mode.
 - **Priority** displays the available size for priority mode.
- The **Multi Set / Release** checkbox allows you to request FlashAccess operations for more than one LDEV before applying the changes. If you check this box and then select **Set**, the Multi Set panel opens (see section 3.2) to allow you to place data into FlashAccess cache for more than one LDEV. If you check this box and then select **Release**, the Multi Release panel opens (see section 3.3) to allow you to release FlashAccess data from cache for more than one LDEV.

Note: The Multi Set /Release check box does not allow you to select and cancel an individual FlashAccess data area specified for an LDEV. You must use the **Release** button to cancel an individual FlashAccess data area.
- The **Set** button adds the requested FlashAccess operation (place data in FlashAccess cache) to the LDEV information table.
- The **Release** button adds the requested FlashAccess operation (remove data from FlashAccess cache) to the LDEV information table.

3.2 Multi Set Panel

The Multi Set panel (see Figure 3.11) allows select the LDEVs for which you want to place data into FlashAccess cache. To open the Multi Set panel, select the desired options on the FlashAccess main panel, check the **Multi Set / Release** box, and then select the **Set** button.

To specify a range of data to place in FlashAccess cache, enter the starting and ending addresses in the **From** and **To** boxes, and then select **Set** to open the Multi Set panel. To place all data areas of the selected LDEVs into FlashAccess cache, check the **Select All Area** box, and then select **Set** to open the Multi Set panel.

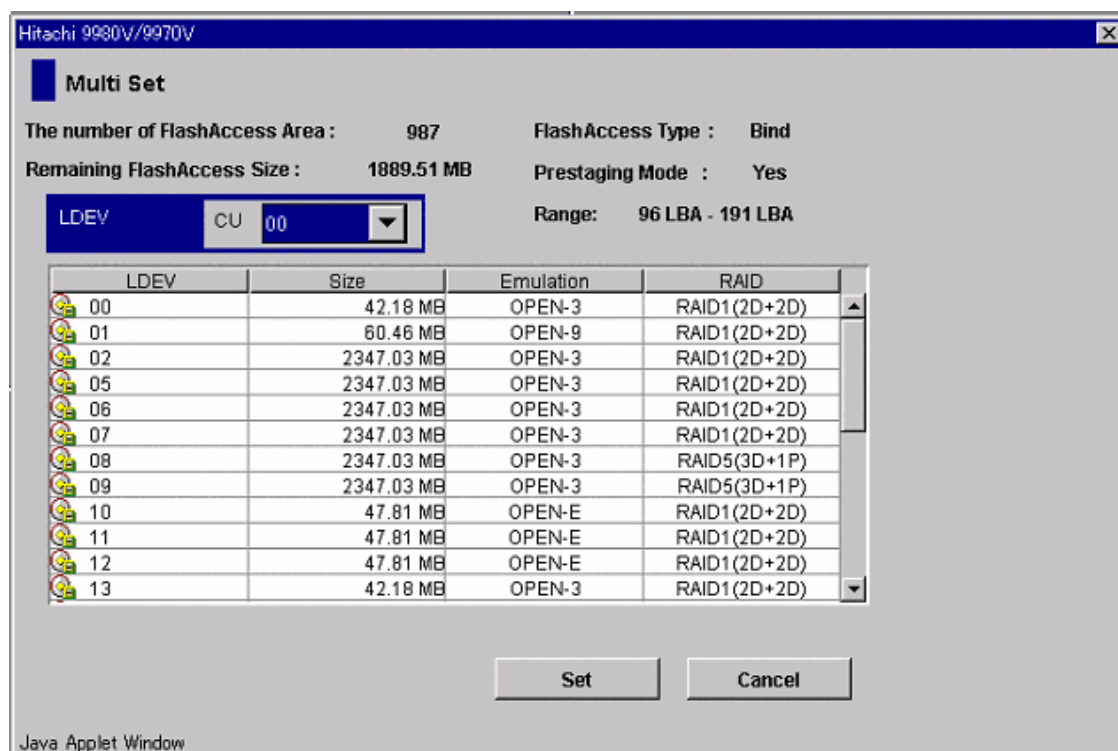


Figure 3.11 Multi Set Panel

The Multi Set panel has the following features:

- The **number of FlashAccess Area** displays the number of FlashAccess cache extents that can be created.
- The **Remaining FlashAccess Size** field displays the size of unused FlashAccess caches.
- The **FlashAccess Type** field displays the FlashAccess mode (priority or bind) specified by the FlashAccess Type option on the FlashAccess main panel.
- The **Prestaging Mode** field displays the prestaging mode (yes or no) specified by the Prestaging Mode option on the FlashAccess main panel.
- The **Range** indicates the range of data to be placed into FlashAccess cache. The data range is specified using the **From** and **To** fields on the FlashAccess main panel. **All** is displayed if the **Select All Area** box was checked on the FlashAccess main panel.
- The **CU** combo box enables you to select the desired CU image, which displays the LDEVs in the specified CU image in the **LDEV** information table (see below).
- The **LDEV** information table displays detailed information on the LDEVs in the selected CU image. The LDEVs that are listed are available for FlashAccess operations. Select the desired LDEVs in each CU image to place data into FlashAccess cache.
 - **LDEV** displays the LDEV number.
 - **Size** indicates the size of the LDEV.
 - **Emulation** displays the emulation type of the LDEV.
 - **RAID** displays the RAID level of the LDEV.
- The **Set** button saves the requested FlashAccess operations and closes the Multi Set panel.
- The **Cancel** button cancels the requested operations and closes the Multi Set panel.

3.3 Multi Release Panel

The Multi Release panel (see Figure 3.12) allows you to release FlashAccess data from cache for more than one LDEV. To open the Multi Release panel, check the **Multi Set / Release** box on the FlashAccess main panel, and then select the **Release** button.

Note: The **Multi Release** function releases all FlashAccess cache extents for the selected LDEVs. You cannot release individual cache extents for multiple LDEVs. You must use the **Release** button to release individual FlashAccess data areas.

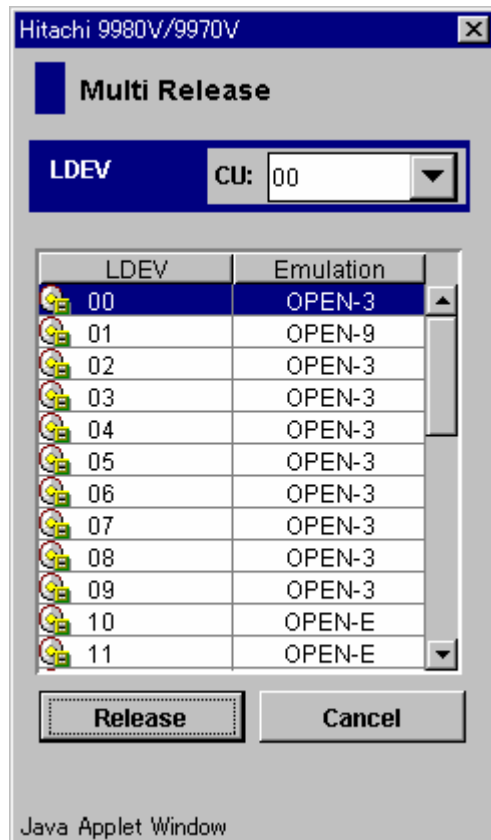


Figure 3.12 Multi Release Panel

The Multi Release panel has the following features:

- The **CU** combo box enables you to select the desired CU image, which displays the LDEVs in that CU image in the **LDEV** information table (see below).
- The **LDEV** information table displays the LDEVs in the selected CU image. The LDEVs that are listed are available for FlashAccess operations. Select the desired LDEVs in each CU image to release all data in the LDEVs from FlashAccess cache.
 - **LDEV** displays the LDEV number.
 - **Emulation** displays the emulation type of the LDEV.
- The **Release** button saves the requested FlashAccess operations and closes the Multi Release panel.
- The **Cancel** button cancels the requested operations and closes the Multi Release panel.

Chapter 4 Performing FlashAccess Operations

FlashAccess allows you to place data into FlashAccess cache and to release data from FlashAccess cache. The FlashAccess operations include:

- Placing specific data from one or more LDEVs into FlashAccess cache (see section 4.1),
- Placing all data from one or more LDEVs into FlashAccess cache (see section 4.2),
- Releasing specific data for one or more LDEVs from FlashAccess cache (see section 4.3),
- Releasing all data for one or more LDEVs from FlashAccess cache (see section 4.4).

For detailed information on the panels displayed by the 9900V FlashAccess software, please refer to Chapter 3.

4.1 Placing Specific Data from one or more LDEVs into FlashAccess Cache

Note: Use this procedure when you want to place specific data from one or more LDEVs into FlashAccess cache.

To place specific data from one or more LDEVs into FlashAccess cache:

1. Connect to the desired 9900V subsystem, and log in with Administrator or FlashAccess write access. Make sure that the Storage Navigator is in **Modify** mode.
2. In the outline view on the FlashAccess main panel (upper left), select the CU which contains the desired LDEV, and then select the desired LDEV.

The LDEV information table displays the information for the selected LDEV. A dash (-) in the **Mode** column indicates an area not already allocated to FlashAccess cache.

3. Select the desired unallocated area in the LDEV information table. The starting and ending addresses of the selected area are displayed in the **From** and **To** fields.

Note: For open systems, the FlashAccess program identifies a logical area in units of 128 blocks for OPEN-V, and 96 blocks for other than OPEN-V. For OPEN-V, if you have entered 1 as the starting logical block address and a value less than 128 as the ending logical block address, FlashAccess automatically changes the ending block address to 128. For other than OPEN-V, if you have entered 1 as the starting logical block address and a value less than 96 as the ending logical block address, FlashAccess automatically changes the ending block address to 96. Refer to Table 1.2 for other than OPEN-V.

4. Select the desired options on the FlashAccess main panel (lower right). You can apply these options to the selected LDEV, or to the selected LDEV and additional LDEVs.
 - a) Select the desired mode (**Bind** or **Priority**) in the **FlashAccess Type** box.
 - b) Select the desired **Prestaging Mode** setting (**Yes** or **No**). **Note:** If you want to set the prestaging function, the **Prestaging** checkbox (upper left corner of FlashAccess panel) must already be selected.
 - c) Verify the starting and ending addresses of the area to be placed in FlashAccess cache in the **From** and **To** fields (see Figure 4.1). Edit as needed. Make sure that the **Select All Area** box is NOT checked.

Caution: Make sure to select the correct options, since the options cannot be changed after data is added to cache. If you want to change between bind mode and priority mode, or enable/disable the prestaging function, you must first release the cache extent that you want to change (see section 4.3), and then place the data back into FlashAccess cache with the desired settings.

5. If you do not want to apply the same options to any other LDEVs, make sure that the **Multi Set / Release** box is not checked, select **Set**, and then select **OK** on the confirmation panel (see Figure 4.2). The requested FlashAccess operation is displayed in blue in the LDEV information table (see Figure 4.5).

If you want to apply the same options and data range to additional LDEVs:

- a) Select the **Multi Set / Release** box on the FlashAccess main panel (see Figure 4.3), select **Set**, and then select **OK** to open the Multi Set panel. The Multi Set panel displays the data range and options selected on the FlashAccess main panel.
 - b) On the Multi Set panel, select the desired CU image, and select the desired LDEV(s) (see Figure 4.4). The data range and options displayed on the panel will be applied to all selected LDEVs.
 - c) Select **Set** to return to the FlashAccess main panel. The requested FlashAccess operations are displayed in blue in the LDEV information table.
6. Repeat steps (2)–(5) until all desired operations are listed.

Note: You cannot use the **Release** button until you apply (or cancel) your requested operation(s).
7. Review the requested operation(s) on the FlashAccess main panel.
 - To start the operation(s), select **Apply** on the FlashAccess main panel, and then select **OK** on the Apply confirmation message.
 - To cancel the operation(s), select **Cancel** on the FlashAccess main panel, and then select **OK** on the Cancel confirmation message.
8. Monitor the FlashAccess main panel to make sure that the operation(s) complete successfully. The cache information area (see section 3.1.3) displays the progress of the requested operation(s).

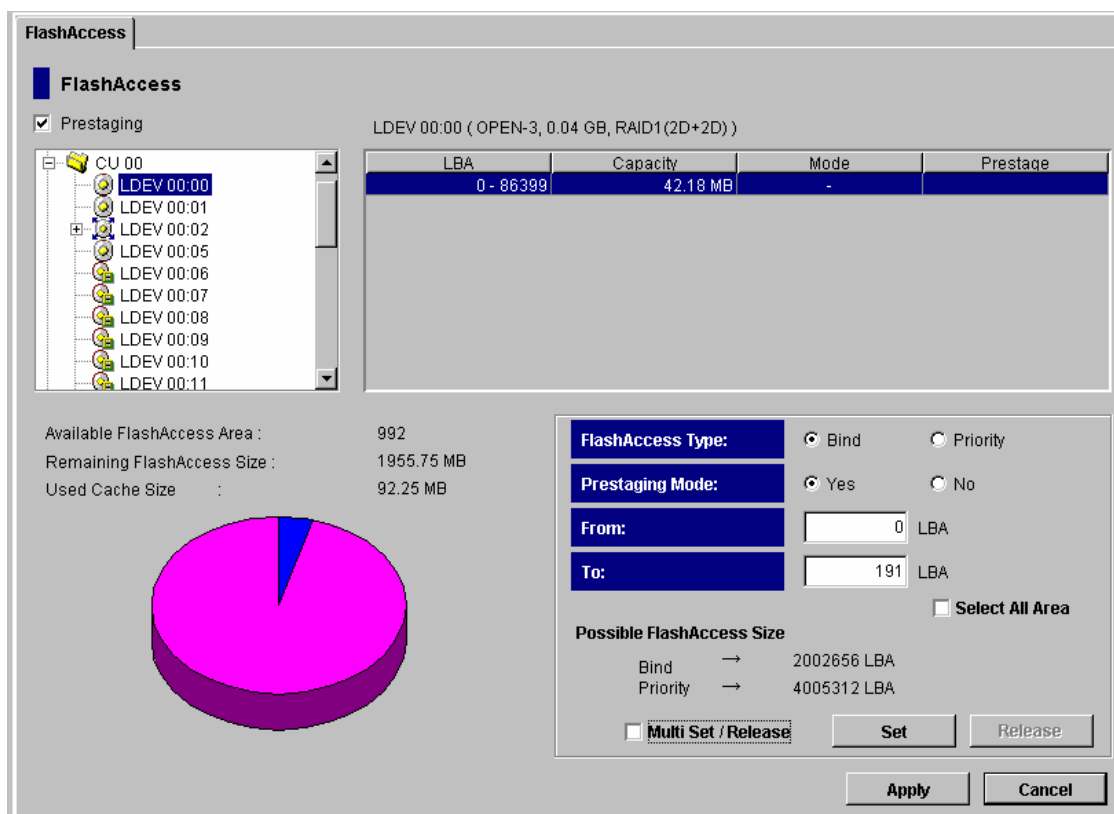


Figure 4.1 Selecting the LDEV and Specifying the Data Area and FlashAccess Options

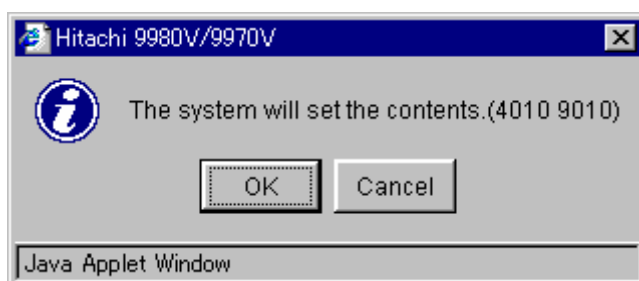


Figure 4.2 Confirmation Message for Placing Data into Cache

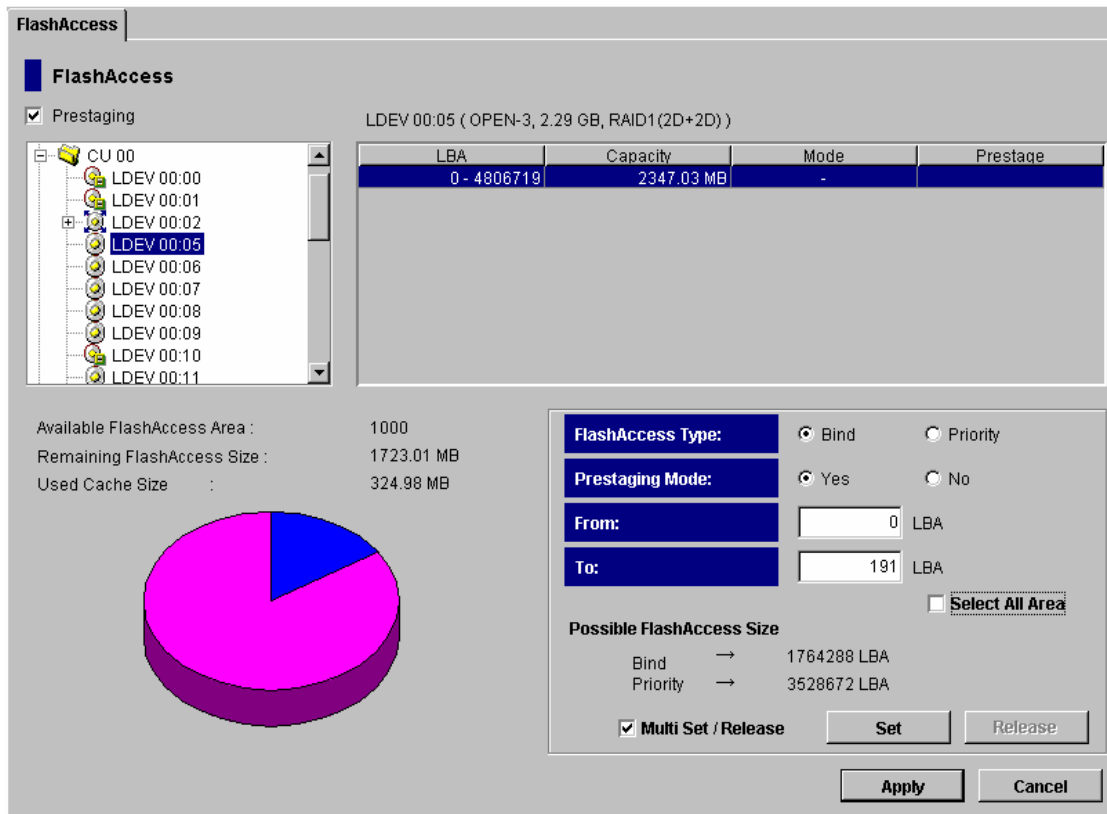


Figure 4.3 Specifying the Same Data Area and Options for Multiple LDEVs

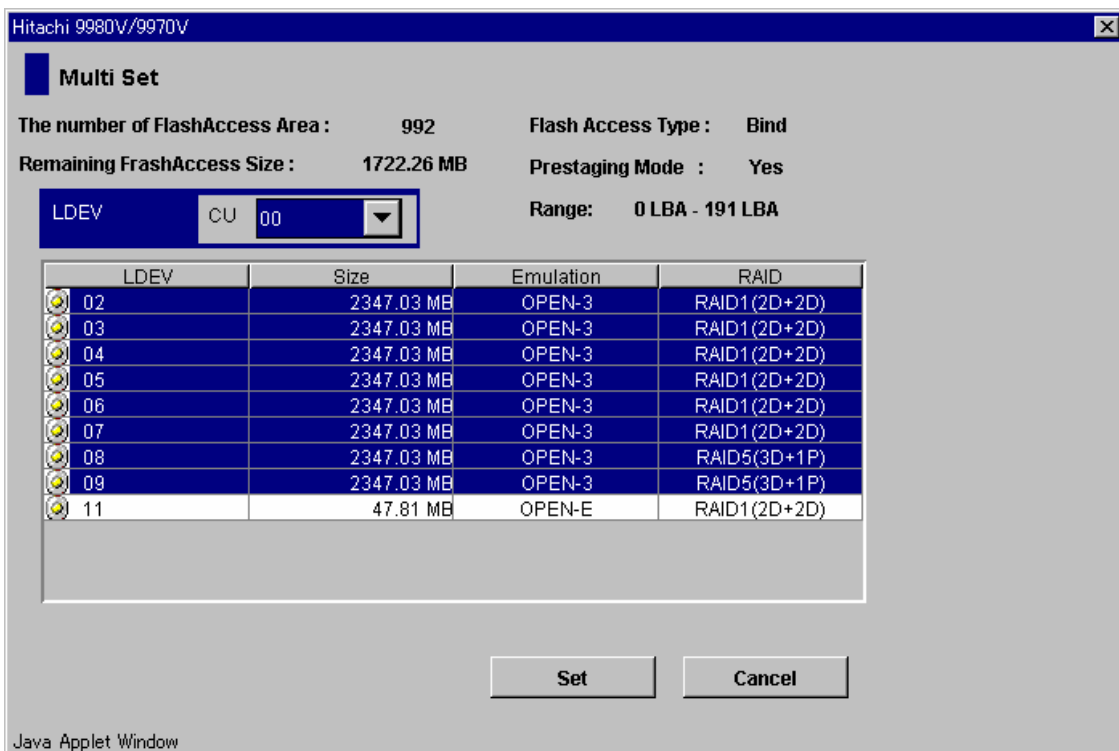


Figure 4.4 Selecting Additional LDEVs on the Multi Set Panel (Specific Data Range)

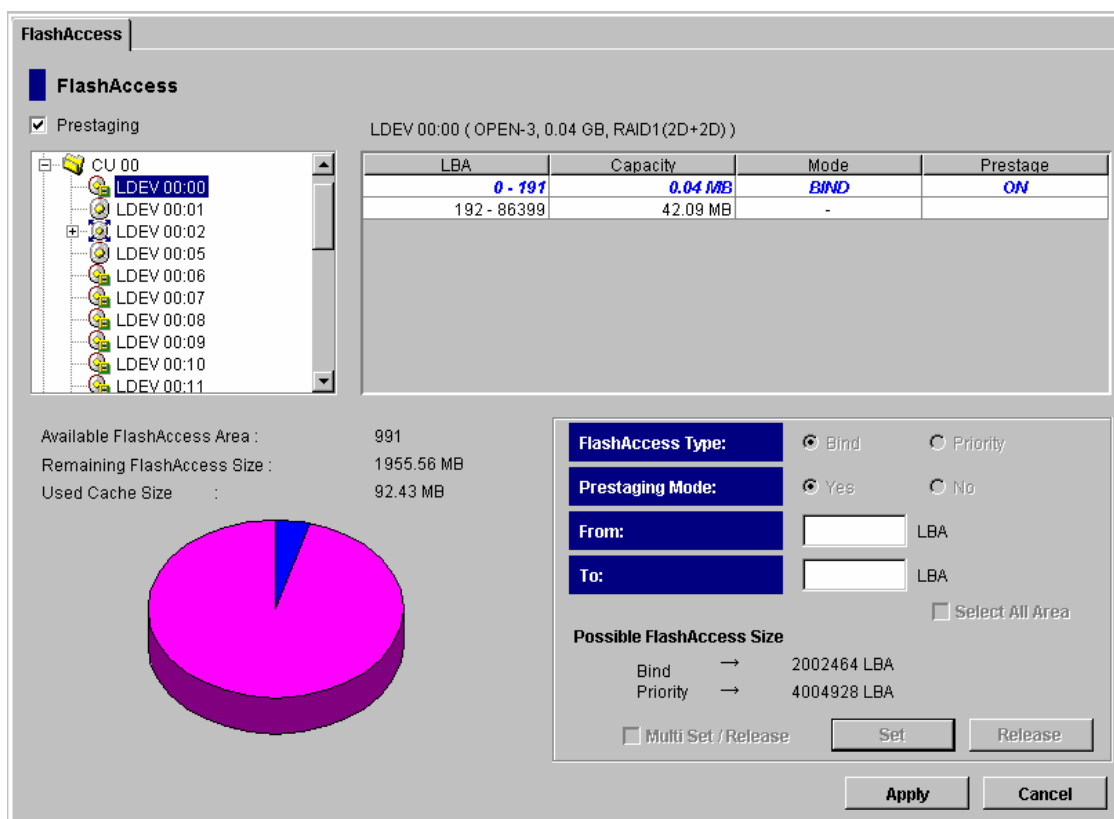


Figure 4.5 Verifying the Add Data Area Operation

4.2 Placing All Data on one or more LDEVs into FlashAccess Cache

Note: Use this procedure when you want to place ALL data on one or more LDEVs into FlashAccess cache.

To place all data on one or more LDEVs into FlashAccess cache:

1. Connect to the desired 9900V subsystem, and log in with Administrator or FlashAccess write access. Make sure that the Storage Navigator is in **Modify** mode.
2. In the outline view on the FlashAccess main panel (upper left), select the CU which contains the desired LDEV, and then select the desired LDEV.

The LDEV information table displays the information for the selected LDEV. A dash (-) in the **Mode** column indicates an area not already allocated to FlashAccess cache.

3. Select the desired options on the FlashAccess main panel (see Figure 4.6):
 - a) Select the desired mode (**Bind** or **Priority**) in the **FlashAccess Type** box.
 - b) Select the desired **Prestaging Mode** setting (**Yes** or **No**). **Note:** If you want to set the prestaging function, the **Prestaging** checkbox (upper left corner of FlashAccess panel) must already be selected.
 - c) Check the **Select All Area** box. Leave the **From** and **To** fields blank.
 - d) Make sure that the **Multi Set / Release** box is NOT checked.

Caution: Make sure to select the correct options, since the options cannot be changed after a cache extent is added. If you want to change between bind mode and priority mode, or enable/disable the prestaging function, you must first release the cache extent that you want to change (see section 4.3), and then place the data back into FlashAccess cache with the desired settings.

4. If you do not want to apply the same options to any other LDEVs, make sure that the **Multi Set / Release** box is not checked, select **Set**, and then select **OK** on the confirmation panel. The requested operation is displayed in blue in the LDEV information table (see Figure 4.9).

If you want to apply the same options to additional LDEVs:

- a) Select the **Multi Set / Release** box on the FlashAccess main panel (see Figure 4.7), select **Set**, and then select **OK** to open the Multi Set panel. The Multi Set panel displays the data range and options selected on the FlashAccess main panel.
- b) On the Multi Set panel, select the desired CU image, and select the desired LDEV(s) (see Figure 4.8). The options displayed on the panel will be applied to all selected LDEVs.
- c) Select **Set** to return to the FlashAccess main panel. The requested FlashAccess operations are displayed in blue in the LDEV information table.

5. Repeat steps (2)–(4) until all desired operations are listed.
Note: You cannot use the **Release** button until you apply (or cancel) your requested operation(s).
6. Review the requested operation(s) on the FlashAccess main panel.
 - To start the operation(s), select **Apply** on the FlashAccess main panel, and then select **OK** on the Apply confirmation message.
 - To cancel the operation(s), select **Cancel** on the FlashAccess main panel, and then select **OK** on the Cancel confirmation message.
7. Monitor the FlashAccess main panel to make sure that the operation(s) complete successfully. The cache information area (see section 3.1.3) displays the progress of the requested operation(s).

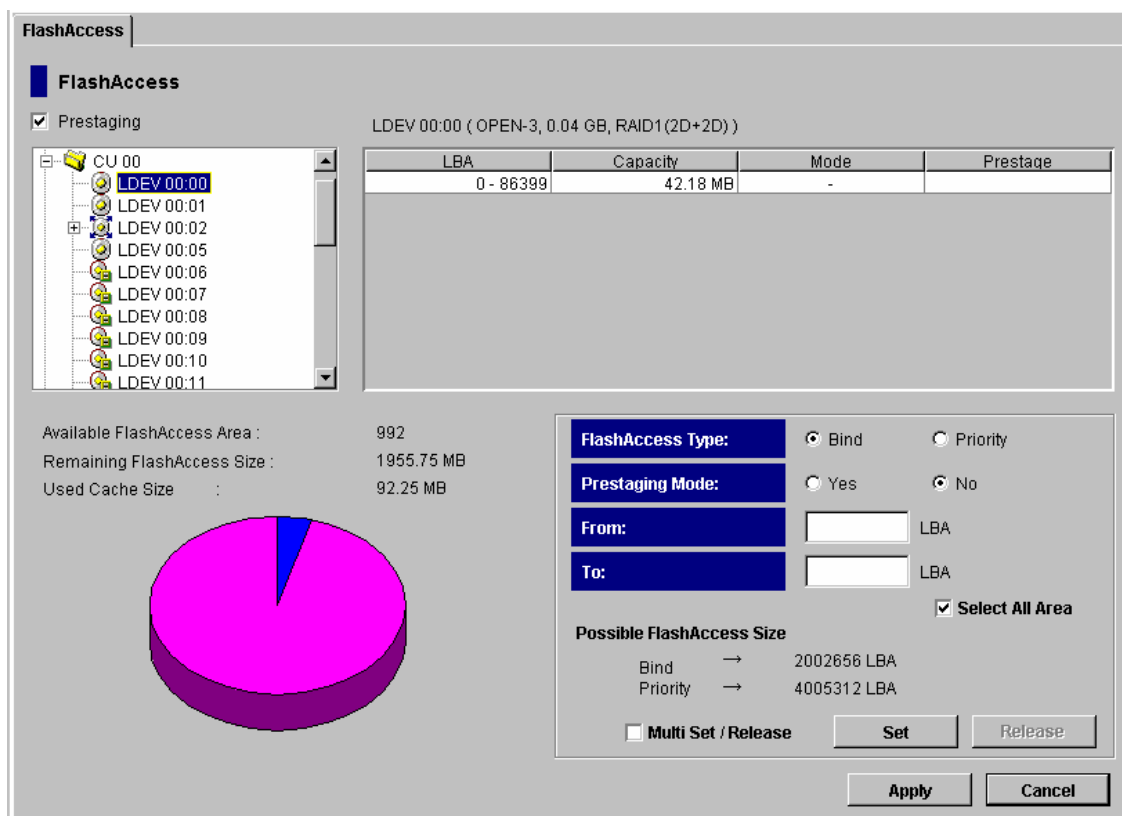


Figure 4.6 Selecting an LDEV and Specifying the Options

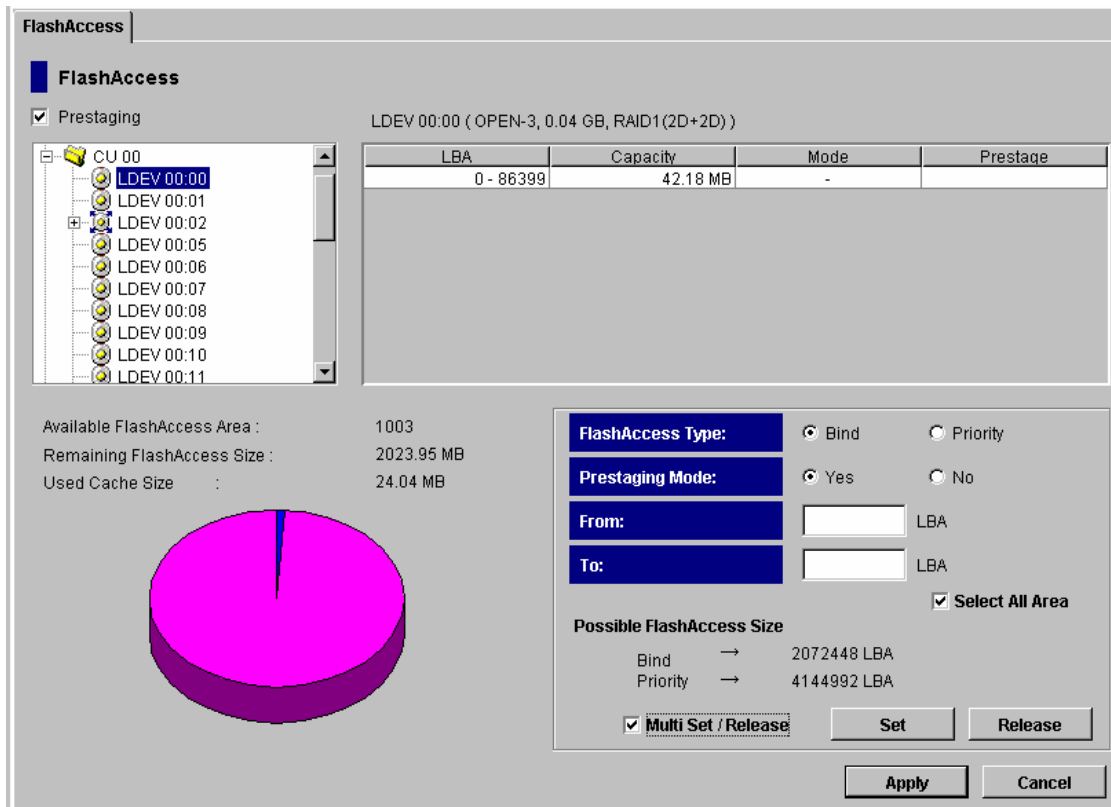


Figure 4.7 Selecting LDEV(s) to Place in FlashAccess Cache

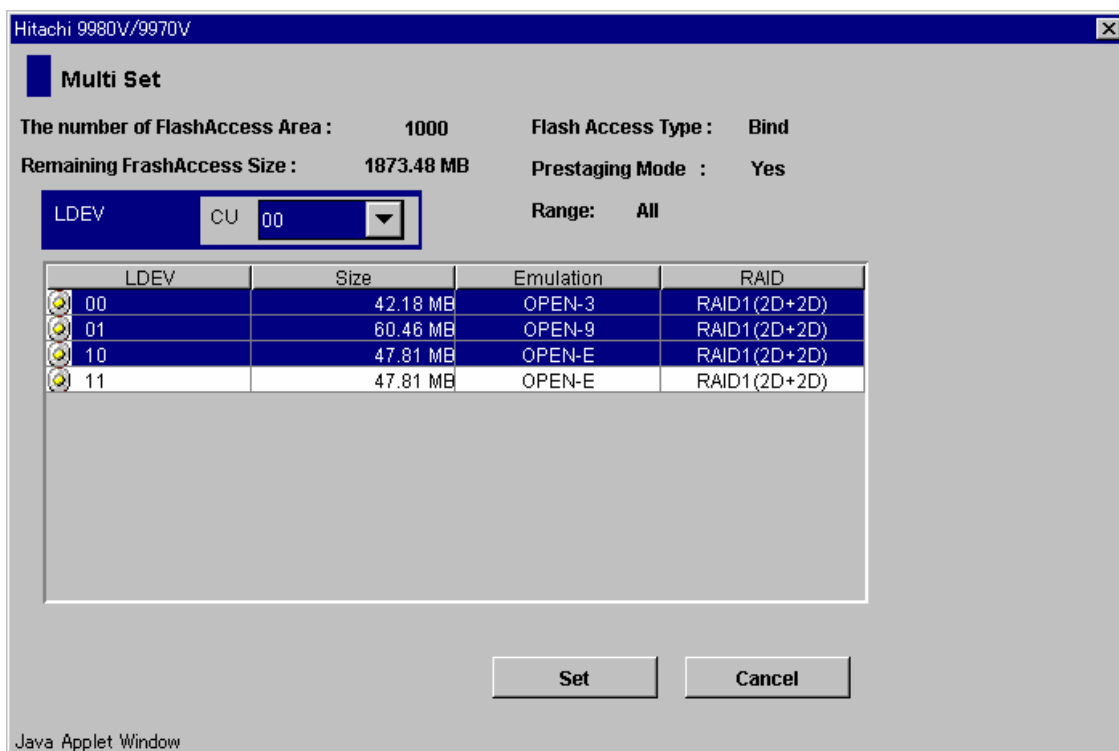


Figure 4.8 Selecting Additional LDEVs on the Multi Set Panel (All Data)

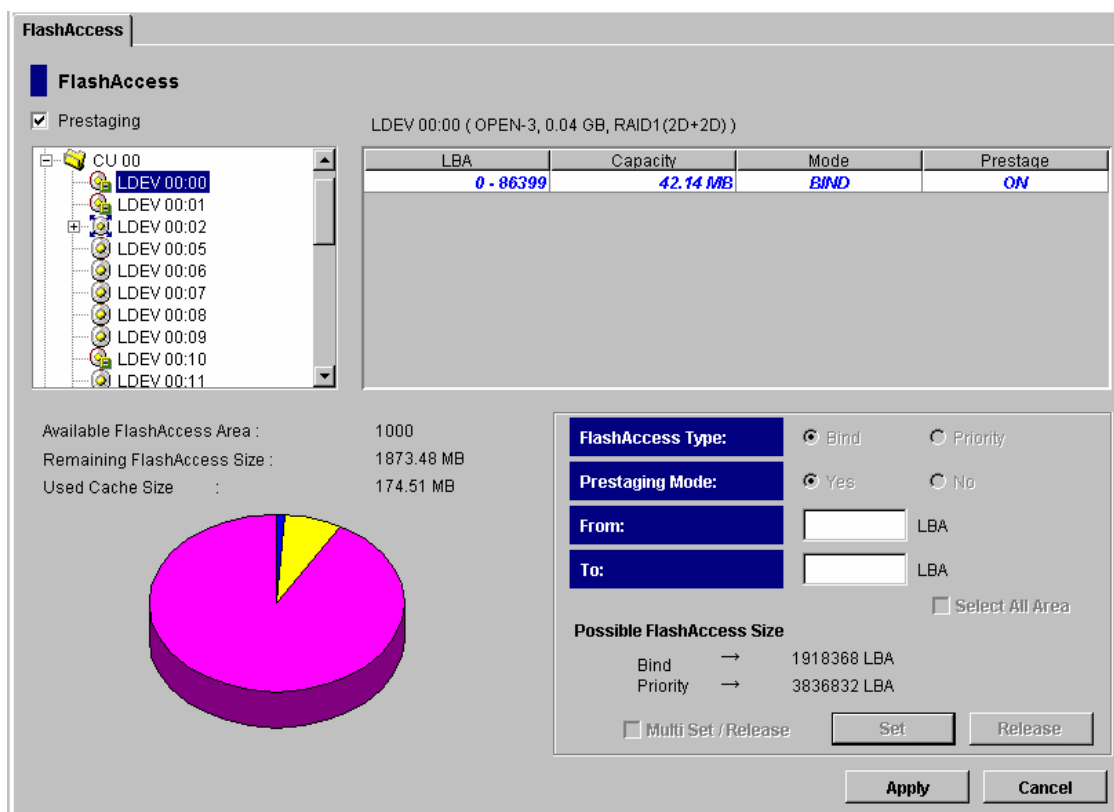


Figure 4.9 Verifying the Add LDEV Operation(s)

4.3 Releasing Specific Data From FlashAccess Cache

Note: Use this procedure when you want to release specific data area(s) on one or more LDEVs from FlashAccess cache.

To release specific data area(s) on one or more LDEVs from FlashAccess cache:

1. Connect to the desired 9900V subsystem, and log in with Administrator or FlashAccess write access. Make sure that the Storage Navigator is in **Modify** mode.
2. In the outline view on the FlashAccess main panel (upper left), select the CU which contains the desired LDEV, and then select the desired LDEV.

The LDEV information table displays the information for the selected LDEV. The **Mode** column displays **Prio** or **Bind** for each data area that is allocated to FlashAccess cache (see Figure 4.10).
3. Select the data area(s) that you want to release from FlashAccess cache. This enables the **Release** button.
4. Select the **Release** button, and select **OK** on the confirmation message (see Figure 4.11).
The requested operation is displayed in blue in the LDEV information table (Figure 4.12).
5. Repeat steps (2)–(4) for each LDEV for which you want to release specific data from FlashAccess cache.

Note: You cannot use the **Set** button until you apply (or cancel) your requested operation(s).
6. Review the requested operation(s).
 - To start the operation(s), select **Apply** on the FlashAccess main panel, and then select **OK** on the confirmation message.
 - To cancel the operation(s), select **Cancel** on the FlashAccess main panel, and then select **OK** on the confirmation message.
7. Monitor the FlashAccess main panel to make sure that the operation(s) complete successfully. The cache information area (see section 3.1.3) displays the progress of the requested operation(s).

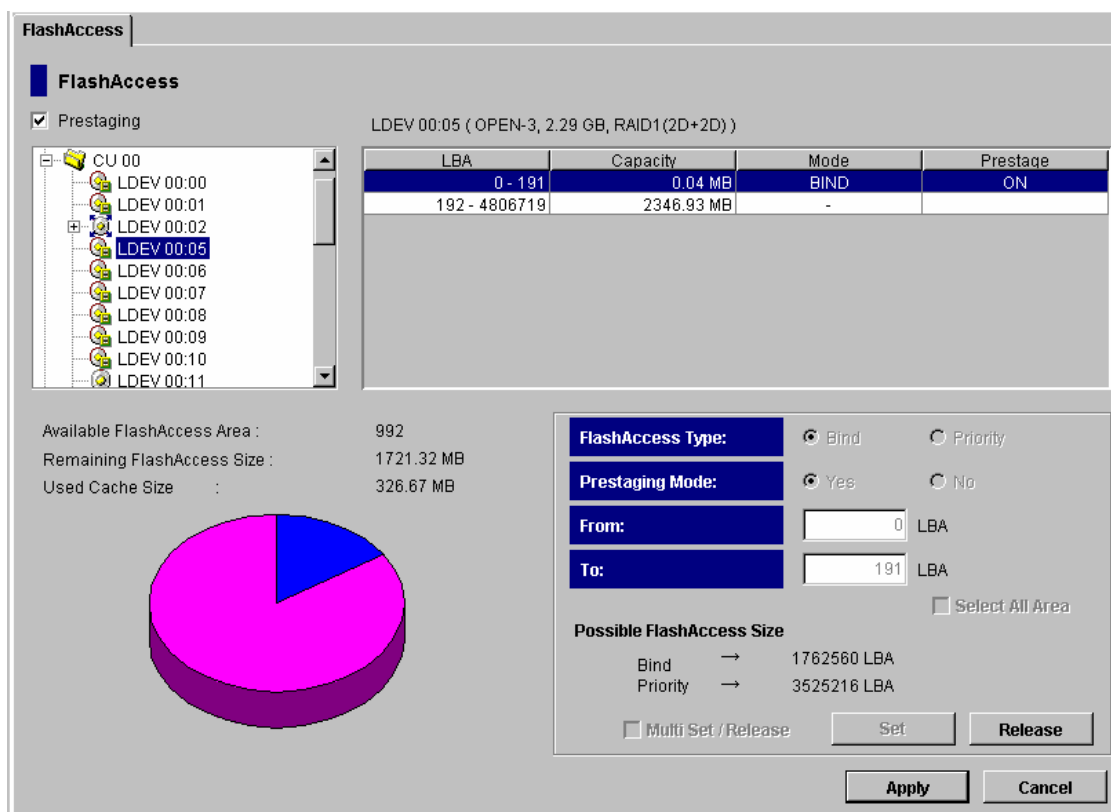


Figure 4.10 Selecting a Data Area for Release

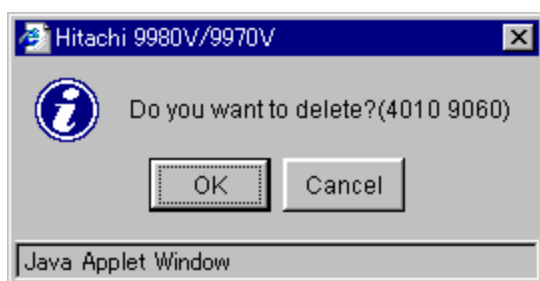


Figure 4.11 Confirmation Message for Deleting Data

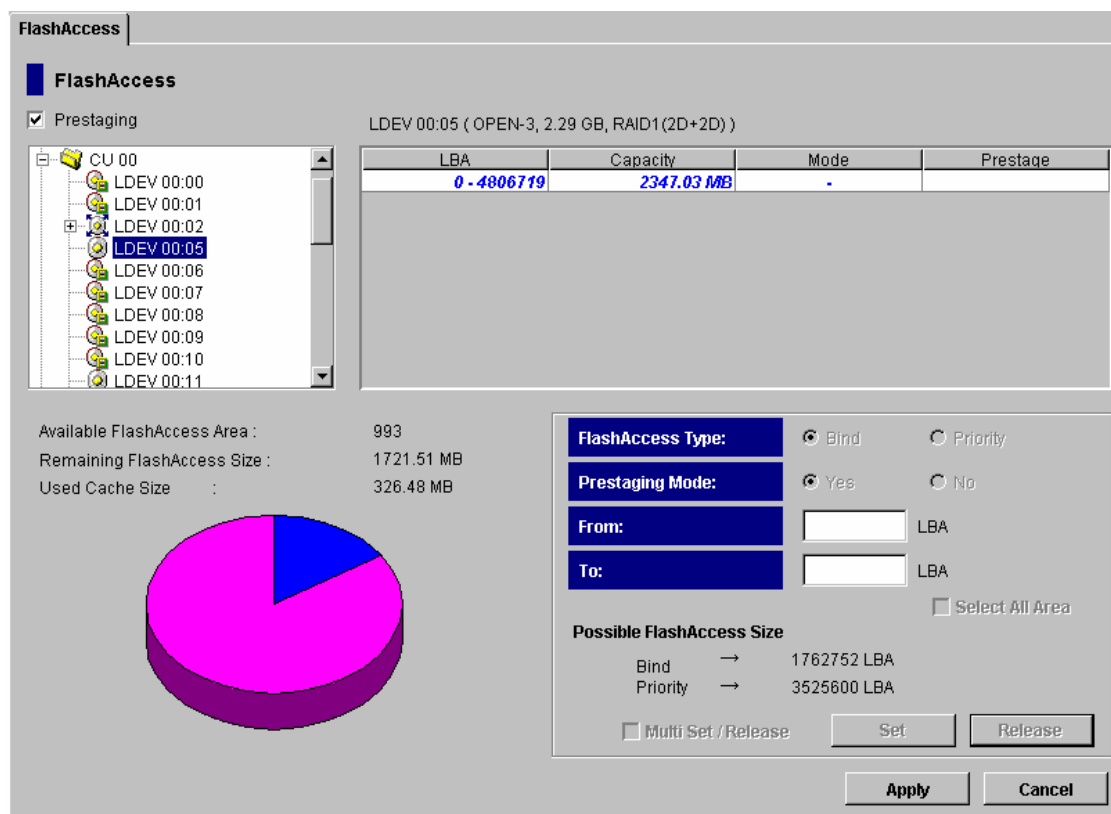


Figure 4.12 Verifying the Release Data Operation(s)

4.4 Releasing LDEV(s) from FlashAccess Cache

Note: Use this procedure when you want to release ALL data on one or more LDEVs from FlashAccess cache.

To release all data on one or more LDEVs from FlashAccess cache:

1. Connect to the desired 9900V subsystem, and log in with Administrator or FlashAccess write access. Make sure that the Storage Navigator is in **Modify** mode.

2. In the outline view on the FlashAccess main panel (upper left), select the CU which contains the desired LDEV, and then select the desired LDEV (see Figure 4.13).

The LDEV information table displays the information for the selected LDEV. The **Release** button is enabled if the selected LDEV has data that is stored in FlashAccess cache (indicated by **Prio** or **Bind** in the **Mode** column).

3. If you do not want to release any other LDEVs from FlashAccess cache, make sure that the **Multi Set / Release** box is not checked, select **Release**, and then select **OK** on the confirmation panel. The requested operation is displayed in blue in the LDEV information table (see Figure 4.15).

If you want to release additional LDEVs from FlashAccess cache:

- a) Check the **Multi Set / Release** box, select **Release**, and then select **OK** on the confirmation message (refer to Figure 4.11) to open the Multi Release panel.
 - b) On the Multi Release panel, select the desired CU image, and select the desired LDEV(s) to release from FlashAccess cache (see Figure 4.14).
 - c) Select **Release** to return to the FlashAccess main panel. The requested FlashAccess operations are displayed in blue in the LDEV information table.
4. Repeat steps (2) and (3) until all desired operations are listed.

Note: You cannot use the **Set** button until you apply (or cancel) your requested operation(s).

5. Review the requested operation(s) on the FlashAccess main panel.
 - To start the operation(s), select **Apply** on the FlashAccess main panel, and then select **OK** on the Apply confirmation message.
 - To cancel the operation(s), select **Cancel** on the FlashAccess main panel, and then select **OK** on the Cancel confirmation message.
6. Monitor the FlashAccess main panel to make sure that the operation(s) complete successfully. The cache information area (see section 3.1.3) displays the progress of the requested operation(s).

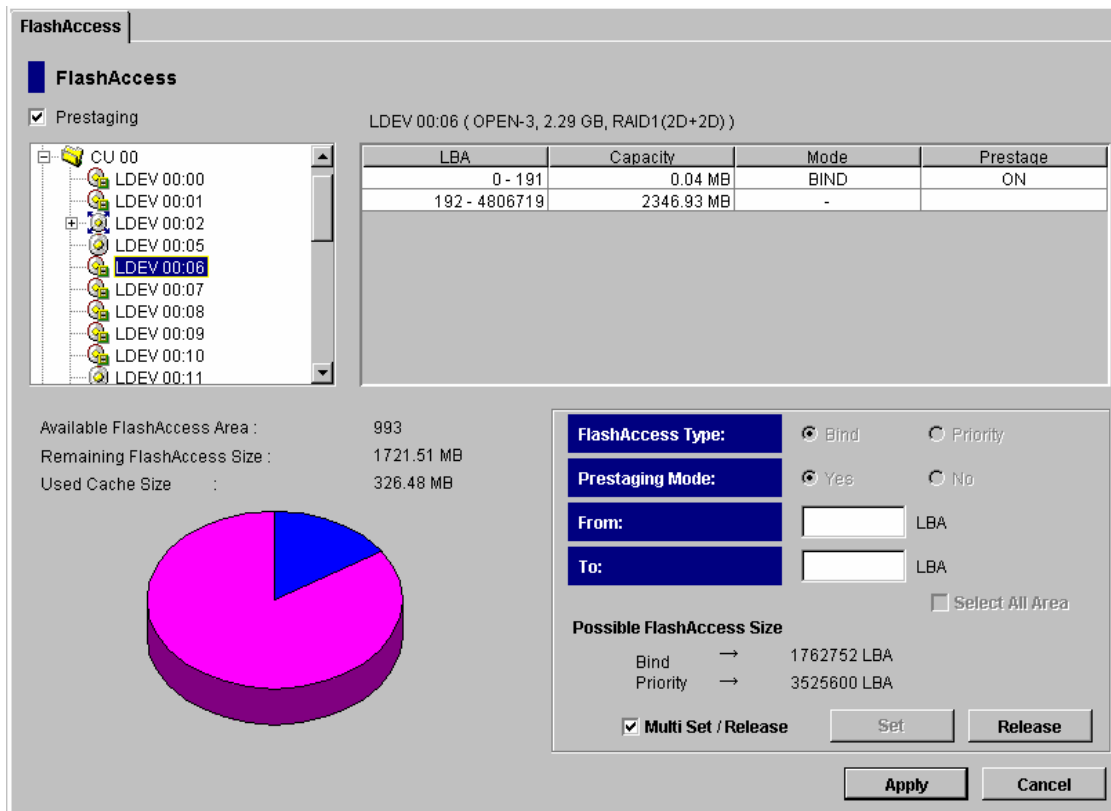


Figure 4.13 Selecting LDEV(s) to Release from FlashAccess Cache

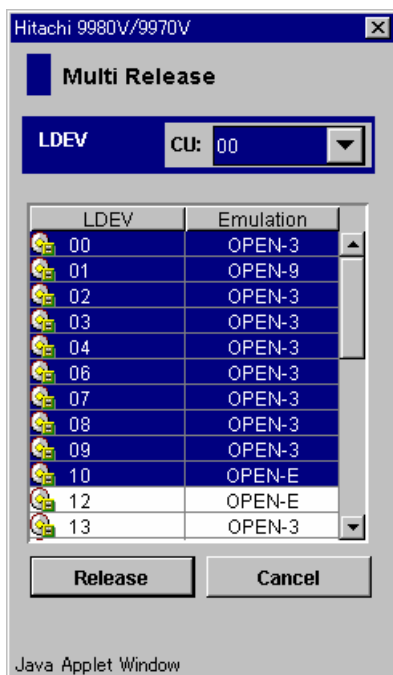


Figure 4.14 Selecting Multiple LDEVs on the Multi Release Panel

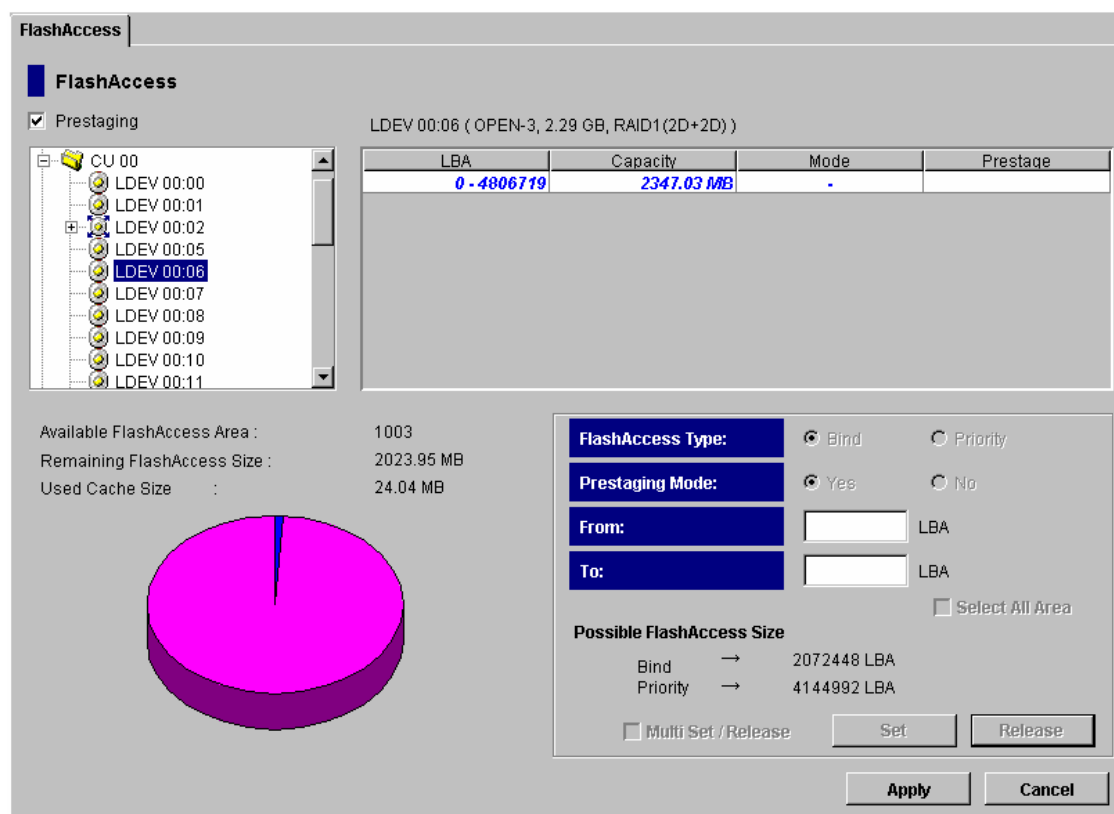


Figure 4.15 Verifying the Release LDEV Operation(s)

Chapter 5 Troubleshooting

5.1 Troubleshooting

- For troubleshooting information on the 9900V subsystem, please refer to the *Hitachi Freedom Storage™ Lightning 9900™ V Series User and Reference Guide* (MK-92RD100).
- For troubleshooting information on the Storage Navigator software, please refer to the *Hitachi Lightning 9900™ V Series Remote Console - Storage Navigator User's Guide* (MK-92RD101).
- For information on the 9900V Storage Navigator error codes, please refer to the *Hitachi Freedom Storage™ Lightning 9900™ V Series Hitachi Remote Console - Storage Navigator Error Codes* (MK-92RD132).

5.2 Calling the Hitachi Data Systems Support Center

If you need to call the Hitachi Data Systems Support Center, make sure to provide as much information about the problem as possible. Include the circumstances surrounding the error or failure, the 9900V Storage Navigator configuration information saved in the floppy diskette(s) by the **FD Dump Tool**, the exact content of any messages displayed on the Storage Navigator, and the severity levels and reference codes displayed on the **Status** tab of the Storage Navigator Main panel.

The worldwide Hitachi Data Systems Support Centers are:

- Hitachi Data Systems North America/Latin America
San Diego, California, USA
1-800-348-4357
- Hitachi Data Systems Europe
Contact Hitachi Data Systems Local Support
- Hitachi Data Systems Asia Pacific
North Ryde, Australia
011-61-2-9325-3300

Acronyms and Abbreviations

CCHH	cylinder, cylinder, head, head
CU	control unit
FD	floppy disk
kB	kilobyte
LBA	logical block address
LDEV	logical device
LU	logical unit
LUN	logical unit number, logical unit
LUSE	LUN Expansion
LVI	logical volume image
MB	megabyte
prio	priority mode
RAID	redundant array of independent disks
VDEV	virtual device
VLL	Virtual LVI/LUN

Index

9

9900V subsystem, requirements for, 9

B

bind mode, 2-4

C

cache extents, 5
cache slot, 5
customer support, 39

D

destaging of data, 4, 5
disabling the FlashAccess option, 10

E

enabling the FlashAccess option, 10

F

FlashAccess
 cache extents, 5
 enabling and disabling, 10
 main panel, 11-19
 modes, 2-4
 overview, 1
 placing data into cache, 24-28
 placing LDEV into cache, 29-32
 preparing for, 10
 RAID-5, RAID-1, 3
 releasing data from cache, 33-35
 releasing LDEV from cache, 36-38
 requirements, 9
 restrictions, 6
 troubleshooting, 39

J

Just In Time volumes, 6

L

LDEV information table, 15
logical block addresses (LBAs), 5, 7

M

modes
 bind mode, 2-4
 priority mode, 2
Multi Release panel, 22
Multi Set / Release checkbox, 19
Multi Set panel, 20-21

P

placing data into FlashAccess cache, 24-28
placing LDEV into FlashAccess cache, 29-32
preparing for FlashAccess, 10
prestaging function, 5, 14
priority mode, 2

R

RAID-5, 3, 4
releasing data from FlashAccess cache, 33-35
releasing LDEV from FlashAccess cache, 36-38
requirements, 9
restrictions, 6

S

slot, 5
Storage Navigator requirements, 9

T

technical support, 39
tracks, 5
troubleshooting, 39

V

Virtual LVI/LUN, 4, 6

